

IMPORTANT CUSTOMER INFORMATION

Bashlin has supplied quality equipment to Linemen since 1926. You may be able to find products for less, but you will not buy any other Lineman's Equipment that works or wears better than Bashlin's right priced quality products produced in our manufacturing facilities in Grove City, Pennsylvania.

Linework is dangerous. Properly using these products and appropriate training are keys to your safety. To aid in product understanding, as well as proper use of these items, the following information boxes and product application symbols are located with the product write-ups. Please read and understand this information, as well as the material included with and attached to product BEFORE using these items. If there are questions, please contact us via the various methods listed at the bottom of the page.



FALL ARREST

More than 2', but not more than 6' free fall. (Full body harness)



POSITIONING

Maximum 2' free fall. (Positioning belts, Line belts)



RETRIEVAL

For rescue from enclosed confined spaces. (Full body harness)



NOT A SAFETY BELT

Not to be considered personal protective equipment.

MANUFACTURER'S WARRANTY

The Manufacturer warrants equipment manufactured by it to be free from defects in material and workmanship under normal use and service, its obligation under this warranty being limited to replacing at its factory any part or parts which shall, within 30 days after delivery of such equipment to the original purchaser, be returned to it and which its examination shall disclose to its satisfaction to have been thus defective; this warranty being expressly in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on its part.

THE INFORMATION IN THIS CATALOG IS TO THE BEST OF OUR KNOWLEDGE CORRECT AT THE TIME OF PRINTING. WE RESERVE THE RIGHT TO MAKE IMPROVEMENTS AND CHANGES AS NECESSARY TO OUR PRODUCTS WITHOUT NOTICE.

WARRANTED AND ALL OTHER REPAIR WORK MUST BE DONE BY BASHLIN FACTORY PERSONNEL USING BASHLIN COMPONENTS.

TERMS AND CONDITIONS

Pricing - Prices are subject to change without notice. The cost of Bashlin products is as low as is consistent with quality merchandise. We encourage comparison.

Payment - Open account terms are available once credit has been established. Bashlin accepts all major credit cards and cash advance orders. On cash advance orders, overpayment of less than \$2.00 cannot be refunded.

Shipping - All freight terms are F.O.B. shipping point unless otherwise stated.

Contested Shipments - Any shipping or handling claims must be reported within 14 days of shipment. Claims not reported in this time period will not be allowed.

Returned Goods - Returns must be authorized prior to shipment to our warehouse. There is a handling charge on all returned goods.



119 West Pine Street, P.O. Box 867 Grove City, PA 16127
Phone: 724.458.8340 Fax: 724.458.8342 bashlin@bashlin.com



**USE YOUR PHONE
CAMERA TO SCAN
THE QR CODES IN
THIS CATALOG FOR
MORE INFO ABOUT
OUR PRODUCTS**





BASHLIN'S FALL PROTECTION AND CLIMBING EQUIPMENT REGULATIONS AND REQUIREMENTS

The equipment used by linemen, cablemen, arborists, and tower workers is manufactured in accordance with consensus standards as well as regulations developed by federal or state authorities. These regulations are important for you because they provide guidelines not only for the users, but also the manufacturers and your employer.

Consensus standards are voluntarily developed. They are approved by the users and manufacturers of the products. The standards are administered by such bodies as the American National Standards Institute, (ANSI) and the American Society of Testing and Materials (ASTM). Following are some consensus standards that apply to these products:

ANSI STANDARDS

- ANSI/ASSP Z359.1 The fall protection code 
- ANSI Z133 Safety requirements for arboricultural operations.
- ANSI A10.32 Standard for fall protection system used in construction  and demolition.


ASTM STANDARD

- F887 Standard specifications for personal climbing equipment

OSHA STANDARDS FOR GENERAL INDUSTRY

Government groups also write laws that they refer to as standards regarding such things as the use of these products. Many times, sections are based on the consensus standards. The difference is that they are mandatory.

Following are some standards that may apply to the users of these products.

- 1910.269 Electric power, generation, transmission and distribution.
- 1910.268 Telecommunications. 
- 1910.67 Vehicle mounted elevating and rotating work platforms.
- 1910.140 Personal fall protection systems.

OSHA STANDARDS FOR CONSTRUCTION

- 1926 Subpart M Fall protection.
- 1926.500 to 1926.503
- 1926.954 Personal protective equipment.

For more information, contact your corporate safety professional, supervisor, local OSHA office or insurance carrier.

To the best of our knowledge, Bashlin equipment meets or exceeds all applicable standards or laws at the time of manufacture.

Bashlin Industries Inc. utilizes Underwriters Laboratories  for independent 3rd party certification on many products. Look for the  symbol. Certificates of compliance available on request and on our website.



IMPORTANT INFO is included with each product. It must be read and understood prior to use. If none is included with your product, or if there are any questions, contact us immediately. Failure to understand the information, or be properly trained prior to using the product may cause accidents, injury, or death.

Linemen's
Climbing
Equipment

5

Fall Protection
and Rescue Equipment
for Lineworkers
and General Industry

39

Bags, Buckets
and Tool Carriers

67

Line Vehicle Equipment
and Construction Tools

79

Electrical Personal
Protective Equipment

91

Gloves, PPE,
and Training

101




LINEMEN'S CLIMBING EQUIPMENT

Bashlin Industries, Inc. has been manufacturing tool belts, positioning devices, and climbers since 1926. Offering quality, comfort and durability, these products have been time tested and lineworker approved.

We recommend that the user understands how to properly use, inspect and maintain this equipment. Information about this appears in this catalog and more detailed information is included with Bashlin products.

SIZING TOOL BELTS


Bashlin belts are sized using the measurement between the 2 D-Rings on the main portion of the belt **(A)**.



2 D-Ring and 4 D-Ring belts are sized identically.

Measure for summer clothing. If the belt is the correct size, there will be ample adjustment for the relatively limited time it will be used in the colder weather.

If a belt is sized correctly, the hip D-Rings will point straight ahead, and the tongue adjustment will be in the center hole **(B)**.

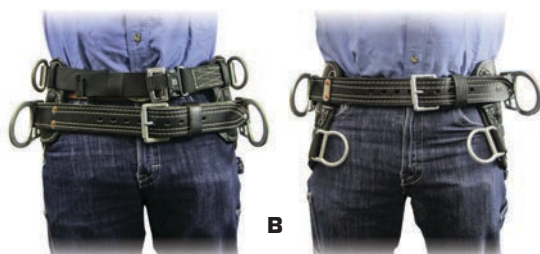

CORRECTLY SIZED TOOL BELT

USE BASHLIN'S LINEMAN'S SIZING BELT (LSB) **(E)**

Estimate the correct size of your belt and adjust the LSB to the size you believe your belt should be.

Place the LSB on your hips at the location where your tool belt is worn **(F)**.


By trial and error, change the length of the LSB until the belt is the correct length, and note the adjusted size of the belt **(G)**.



E




USING THE LINEMEN'S SIZING BELT



G

TO FIND YOUR D-RING SIZE USING A TAPE MEASURE

1. Locate the point where the heel of the hip D-Ring should rest **(C)**.
2. Begin to measure from this point. Measure with a seamstress tape around the buttocks to the same point on the opposite side **(D)**.

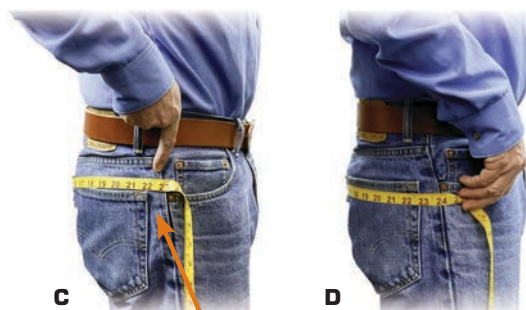

C

D



USING A TAPE MEASURE

BELT ADJUSTMENT IN INCHES - PER ASTM F887

D Size - In.	Minimum	Center Hole	Maximum	Tool Loops
D18	32	36	40	3
D19	33	37	41	3
D20	34	38	42	3
D21	36	40	44	4
D22	37	41	45	4
D23	38	42	46	4
D24	40	44	48	4
D25	41	45	49	4
D26	42	46	50	4
D27	44	48	52	4
D28	45	49	53	4

USE YOUR PHONE TO SCAN THE QR CODE FOR SIZING INFO!



FEATURES OF BASHLIN BELTS

S-SHAPED D-RINGS:

This is Bashlin's original design. The toe lies away from the belt for easier snap engagement, while the curve reduces pressure on the hip for comfort.

ALL LEATHER CUSHION SECTION:

The glove soft, rolled edge cushion provides for a belt which is cooler in the summer, yet flexible in cold weather.

TOP QUALITY MATERIAL:

We utilize the highest quality hardware, nylons, and leathers available.

BASHLIN CRAFTSMANSHIP:

Years of quality manufacturing are built into each product for a subtle, yet meaningful difference. We encourage side by side comparison.

BASHLIN TOOL BELT STYLES

4 D-RING TOOL BELTS:



88MX4D

STACKED 4 D-RING



884D

IN-LINE 4 D-RING



88BMX

HIP-GRIP/REST-A-BACK 4 D-RING



88FFX

STACKED FLEX-FIT 4 D-RING



1515PX

STACKED FIXED 4 D-RING

2 D-RING TOOL BELTS:



1511N

STANDARD - FIXED 2 D-RING



88

SEMI-FLOATING - SHIFTING 2 D-RING

! STANDARD EQUIPMENT ON BASHLIN BELTS INCLUDES: 4 D-Rings for gut strap attachment (exception - Hip-Grip and Rest-A-Back belts), tape sling, knife snap, glove bag ring and 2 hammer loops and 4 tool loops.

! MADE TO ORDER BELTS All "Made to Order" belts are manufactured outside of standard production. Once the order is placed, it cannot be cancelled. Please allow additional shipping time for all made to order belts.

! STOCK AND SPECIAL BELTS Bashlin offers right handed belts, in sizes D18 to D28 of the most popular belts. Belt sizes may vary on different style belts. Larger belts, up to D32, may be ordered. There is an additional cost for sizes D29 to D32. Belts and holsters with left hand design are available at no additional cost. Add "LH" to the part number.

NOTE: D18, D19, and D20 tool belts have 3 tool loops due to the shorter belt section.

Bashlin 4 D-Ring Body Belts are patented under PAT 9.737.737, 10.099.073, 10.933.261, 10.946.248 and 12.042.678



FLEX-FIT

88FFX4D CLIMBING BELT

Bashlin's 88FFX4D *FLEX-FIT* 4 D-Ring Climbing Belt allows the worker to easily adjust both upper and lower sets of D-Rings for a custom fit. This unique dual semi-float design allows both the upper and lower set of D-rings to move freely to improve comfort.

The innovative *FLEX-FIT* design allows this belt to be adjusted to fit three different D-sizes to maintain proper fit without sacrificing comfort. This adjustability lets the user quickly adjust the belt to accommodate heavier clothing in inclement weather or for changes in the user's weight over time.

The Bashlin 88FFX4D *FLEX-FIT* 4 D-Ring Climbing Belt is available with our standard padded leather comfort cushion or our new "Hybrid" cushion. The hybrid cushion has a soft leather outer shell and a padded nylon mesh interior cushion.

No. 88FFX4DMP Hybrid Mesh Cushion
No. 88FFX4DCC Leather Comfort Cushion

Wt. 7.0 lb.
Wt. 7.5 lb.



No. 88FFX4DCC
Shown with optional 25AF
and 111FLDSX



No. 88FFX4DMP

SIZE CHART

Small	D18-D20
Medium	D21-D23
Large	D24-D26
X-Large	D27-D29
2X-Large	D30-D32

USE YOUR PHONE TO SCAN THE
QR CODE FOR MORE INFO!





FLEX-FIT

88FFX4D CLIMBING BELT

ADJUSTING THE 88FFX4D FLEX-FIT CLIMBING BELT

Find the two quick-adjusting polymer coated buckles on the back right side of the belt. The top D-saddle adjuster is located under the right tool loops and the bottom D-saddle adjuster is neatly stowed inside the leather pouch.

The D-size can be increased or decreased by lifting the finger tab on the adjuster and pulling on the saddle webbing in the desired direction. Size markings located on the belt body can be used as a reference when adjusting D-size. Once adjustments have been made, users should check the fit by taking a few steps up and down the pole. Pinching and discomfort can be a sign of improper adjustment. Repeat the previous steps if further adjustment is necessary.



25AF AND 25AMF2 SERIES NUT AND BOLT BAGS

These durable canvas nut and bolt bags have all the same features as our popular 25A and 25AM2 nut and bolt bags. The bags can be easily attached or removed from the 88FFX4D series tool belt with two small snap hooks.



No. 25AF	Nut and Bolt Bag	Wt. 0.7 lb.
No. 25AMF2	Nut and Bolt Bag with Magnet	Wt. 1.0 lb.

No. 25AF

No. 25AMF2

111F SERIES TOOL HOLSTERS

111F series tool holsters are built using the same great quality design and versatility as our standard Bashlin tool holsters. These holsters have two snap hooks for quick and easy attachment or removal from the 88FFX4D series tool belts.

No. 111FLSX	4 Pocket Holster	Wt. 1.25 lb.
No. 111FLEX	4 Pocket Holster with Knife Sheath	Wt. 1.50 lb.
No. 111FLDSX	5 Pocket Holster	Wt. 1.50 lb.
No. 111FLDSXE	5 Pocket Holster with Knife Sheath	Wt. 1.75 lb.



No. 111FLDSX

****Most standard nut and bolt bags and holsters are compatible with the 88FFX4D series belts as well****

USE YOUR PHONE TO SCAN THE
QR CODE FOR MORE INFO!



4 D-RING TOOL BELTS



88UX4DMP

EZRIDER



- Like working in a "Rocking Chair".
- Saddle design relieves hip and leg pressure.
- Worn slightly higher than a standard tool belt.
- Semi-Float with shifting upper D-Rings and fixed lower D-Rings.

No. 88UX4DMP	Nylon mesh cushion	Wt. 6.5 lb.
No. 88UX4DCC	Leather comfort cushion	Wt. 7.0 lb.



1515PX4D

EZRIDER LITE



- Our lightest 4 D-Ring belt.
- Nylon or leather cushion.
- Fixed 4 D-Ring.

No. 1515PX4D	Nylon cushion	Wt. 4.6 lb.
No. 1515PX4DCC	Leather comfort cushion	Wt. 4.8 lb.



WARNING: Never carry wire, tools, or anything other than the "positioning" strap in the D-Rings of a tool belt. Foreign objects carried in the D-Rings may cause the snap to malfunction and accidental disengagement to occur.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



Labrador



- 7" wide for support.
- Made in nylon mesh or soft leather cushion.
- 3 different design choices for different needs.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.



Q88GX4DMP

LABRADOR "AMIGO"



- Easy donning quick release buckle upper.
- Tongue and buckle lower.
- Easy to adjust nylon webbing.

No. Q88GX4DMP	Nylon mesh cushion	Wt. 5.5 lb.
No. Q88GX4DCC	Leather comfort cushion	Wt. 6.0 lb.



88GX4DCC

LABRADOR "YUKON"



- Dependable double tongue design.
- Leather faced nylon billet.

No. 88GX4DMP	Nylon mesh cushion	Wt. 6.0 lb.
No. 88GX4DCC	Leather comfort cushion	Wt. 6.5 lb.



88MX4DMP

LABRADOR "LIBERTY"



- The freedom of a single tongue.
- Durable 7" back.

No. 88MX4DMP	Nylon mesh cushion	Wt. 5.0 lb.
No. 88MX4DCC	Leather comfort cushion	Wt. 5.5 lb.

4 D-RING TOOL BELTS



88BMX4DCC

BMX SERIES



- Modeled after Bashlin's Rest-A-Back and Hip Grip, this proven design offers excellent support.
- Double tongue and buckle design.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.

No. 88BMX4DMP	Nylon mesh cushion	Wt. 7.0 lb.
No. 88BMX4DCC	Leather comfort cushion	Wt. 7.0 lb.
No. 88BMX4D	Durable leather back	Wt. 7.0 lb.



884D



88X4D

FLORIDIAN 4D IN-LINE



- 4 D-Ring version of our traditional 88 Floridian belt.
- Semi-Float with shifting D-Rings.
- Leather Comfort Cushion.

No. 884D	Natural	Wt. 6.5 lb.
No. 88X4D	Black	Wt. 6.5 lb.



Q88BMX4DCC

BMX Q SERIES



- Modeled after Bashlin's Rest-A-Back and Hip Grip, this proven design offers excellent support.
- Quick release buckles upper tongue.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.

No. Q88BMX4DMP	Nylon mesh cushion	Wt. 7.0 lb.
No. Q88BMX4DCC	Leather comfort cushion	Wt. 7.0 lb.
No. Q88BMX4D	Durable leather back	Wt. 7.0 lb.



WARNING: All Bashlin's tool belts are to be worn snug as possible with the large D-Rings and billet on or above the hips. Wearing the belts improperly may cause accidents or death.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



2 D-RING TOOL BELTS



88



88X

FLORIDIAN



- Semi-Floating with shifting D-Rings.
- Leather Comfort Cushion

No. 88

Natural

Wt: 6.5 lb.

No. 88X

Black

Wt: 6.5 lb.



160N

NYLON DELUXE



- Semi-Floating with shifting D-Rings.
- Light and durable nylon back.
- Comfortable leather cushion.
- Tongue and buckle is 6 ply nylon.
- Leather tool loops.

No. 160N

Leather comfort cushion

Wt: 6.0 lb.



1511N

WRANGLER



- Fixed D-Rings and shifting billet.
- Neoprene nylon back and tongue.
- Lightweight.

No. 1511N

Leather comfort cushion

Wt: 5.25 lb.



656PX



656CM

656 SERIES



- Fixed D-Ring style.
- Lightweight and versatile.
- Moisture wicking mesh pad.

No. 656PX

Black

Wt: 4.0 lb.

No. 656CM

Brown

Wt: 4.0 lb.



WARNING: Never carry wire, tools, or anything other than the "positioning" strap in the D-Rings of a tool belt. Foreign objects carried in the D-Rings may cause the snap to malfunction and accidental disengagement to occur.



ORANGE STITCHED GEAR

CLIMBING BELTS,
CLIMBER PADS AND
TOOL HOLSTERS ARE
NOW BEING OFFERED
WITH ORANGE
STITCHING AND THE
SAME QUALITY AND
COMFORT YOU'VE
COME TO EXPECT
FROM BASHLIN.



**CONTACT US FOR MORE
INFORMATION ABOUT OTHER
ORANGE STITCHED PRODUCTS.**

EZ RIDER 4D-RING CLIMBING BELT



88UX4DCCO

No. 88UX4DCCO	Leather Comfort Cushion	Wt. 7.0 lb.
No. 88UX4DMP0	Nylon Mesh Cushion	Wt. 6.5 lb.

FLORIDIAN 4D INLINE CLIMBING BELT



*Shown with optional
aluminum D- rings

88X4DO

No. 88X4DCCO	Leather Comfort Cushion	Wt. 6.5 lb.
No. 88X4DMP0	Nylon Mesh Cushion	Wt. 6.0 lb.

TOOL HOLSTERS

111 HLDSX0



111HEX0



No. 11HLDSX0	5 Pocket Holster	Wt. 1.5 lb.
No. 111HEX0	3 Pocket Holster With Knife Sheath	Wt. 1.25 lb.

145 SERIES HOOK-N-LOOP CLIMBER PADS

145ACVWO



145FCVO



Hook-N-Loop climber pads with moisture wicking mesh padding and angled metal insert for added comfort

Wide Profile Hook-N-Loop Climber Pad

No. 145ACVWO For BD16B and BD12 series climbers Wt. 3.5 lb.

No. 145FCVWO For BD14B aluminum climbers Wt. 3.5 lb.

Standard Hook-N-Loop Climber Pad

No. 145ACVO For BD16B and BD12 Series Climbers Wt. 3.2 lb.



ARBORIST SADDLES

BASHLIN'S NEW 639 AND 640 SERIES TREE SADDLES

Incorporating a two D-Ring upper positioning belt and a two D-Ring lower bridge or two D-Ring seat strap assembly for suspension, these modular saddle systems are designed to provide both comfort and flexibility for the worker. The 639 Series Saddles utilize lightweight aluminum D-Rings and the 640 Series Saddles use durable steel D-Rings.

The upper belt is made using the patented Back-A-Line pad that utilizes a unique "curved and firm" back support within a non-stretch belt. Unlike other back belts the Back-A-Line works to dynamically correct posture by facilitating spinal muscles to work optimally. The non-stretch belt works to provide a point of resistance to utilize intra-abdominal pressure.

639BBS TREE SADDLE WITH SEAT STRAP

- Light weight aluminum D-Rings.
- Quick-Release buckles on leg straps.
- 3.5" padded seat strap with D-Rings.
- 8" wide lumbar support with nylon mesh pad.
- Leather faced nylon tongue and buckle
- Soft padding at hips.
- Contrasting orange stitching.
- 2 tool snaps and 2 accessory rings.
- Wt. 5.20 lb.



No. 639BBS



639BBL TREE SADDLE WITH BRIDGE

- Light weight aluminum D-Rings.
- Quick-Release buckles on leg straps.
- Step thru bridge design with floating D-Rings provides added comfort.
- 8" wide lumbar support with nylon mesh pad.
- Leather faced nylon tongue and buckle.
- Soft padding at hips.
- Padded leg straps.
- Contrasting orange stitching.
- 2 tool snaps and 2 accessory rings.
- Wt. 5.15 lb.



No. 639BBL



USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!





ARBORIST SADDLES

The modular design of these belts allows the user to easily remove the back pad, leg pads, and seat strap for cleaning or replacement.

Please refer to sizing chart below:



Belt Size	Waist Size
Small	28-32
Medium	32-36
Large	36-40
X-Large	40-44



640BBS TREE SADDLE WITH SEAT STRAP

- Durable steel D-Rings.
- Pass thru buckles on leg straps.
- 3.5" padded seat strap with D-Rings.
- 8" wide lumbar support with nylon mesh pad.
- Soft padding at hips.
- 2 tool snaps and 2 accessory rings
- Wt. 5.9 lb.



No. 640BBS



640BBL TREE SADDLE WITH BRIDGE

- Durable steel D-Rings.
- Pass thru buckles on leg straps.
- Step thru bridge design with floating D-Rings provides added comfort.
- 8" wide lumbar support with nylon mesh pad.
- Soft padding at hips.
- 2 tool snaps and 2 accessory rings.
- Wt. 5.75 lb.



No. 640BBL



- WARNING -



PROPER TRAINING IS REQUIRED BEFORE USING THESE PRODUCTS.
An improperly sized saddle will be uncomfortable and could result in accidental injury or death.

AUXILIARY POSITIONING AND SUPPORT BELTS



LABRADOR APB



- Easily convert your comfortable 2 D-Ring belt to a 4 D-Ring design.
- Quick release attachment straps.
- Fixed D-Rings for easy secondary lanyard connections.
- FR Arc resistant nylon fabric.
- Size required see sizing chart below.

No. Q83H2D	Labrador "Tucson" quick release belt	Wt. 3.0 lb.
No. 83H2D	Labrador "Sierra" billet style belt	Wt. 3.2 lb.

SIZING

Add 4"-6" to the waist measurement

Small 32"-40" Medium 36"-44" Large 40"-48" X-Large 42"-50"



80HDS

NYLON WEB SUSPENDERS



- Nylon web suspenders.
- Fully adjustable design (one size fits most).
- Lower belt not included*.

No. 80HDS	Nylon web suspenders	Wt. 2.75 lb.
------------------	----------------------	--------------



81-1

81

BELT SUPPORTER STRAP



- Distributes weight of belt and tools.
- Made from top quality russet leather.
- Four adjustable drop straps.
- Lower belt not included.

No. 81	Supporter strap	Wt. 1.50 lb.
No. 81-1	Leather drop strap only	Wt. 0.25 lb.



80

80X

SAM BROWN SUSPENDERS



- Leather suspenders.
- Fully adjustable (one size fits most).
- Lower belt not included.

No. 80	Brown	Wt. 1.25 lb.
No. 80X	Black	Wt. 1.25 lb.



WARNING: Bashlin's Lineman's Belt Supporters are never to be used with a linemens's belt to create a "saddle". The linemens's belt always must be worn snugly, on or above the hips. Incorrect use may cause accidents or death.



NOT A SAFETY BELT

BOLT AND NUT BAGS

25A

8 1/2" x 9" x 4" bolt and nut bag with a reinforced top to stay open.

- No corners to lose hardware.
- Features an inside pocket.
- Secures to a belt with two straps joined by snaps and D-Rings.
- Available in traditional canvas, black ballistic nylon, pink nylon, orange nylon, and camo nylon.



No. 25A

Natural Canvas

Wt: 0.7 lb.



No. 25ABX

Black ballistic nylon

Wt: 0.7 lb.



No. 25A-P

Pink nylon

Wt: 0.7 lb.



No. 25A-O

Orange nylon

Wt: 0.7 lb.



No. 25A-C

Camo nylon bag with straps

Wt: 0.7 lb.

25AM2 WITH MAGNET

Similar to the popular 25A with the addition of 3 inner tool loops, inside pocket and a strong magnet to hold onto hardware such as nuts and cotter keys.



No. 25AM2

Natural canvas

Wt: 1.0 lb.



No. 25AM2BX

Black ballistic nylon

Wt: 1.0 lb.



No. 25AM2-P

Pink nylon

Wt: 1.0 lb.



No. 25AM2-O

Orange nylon

Wt: 1.0 lb.



No. 25AM2-C

Camo nylon

Wt: 1.0 lb.

BOLT AND NUT BAGS



26DRM

- Leather pouch with tool holders and adjustable leather straps.

No. 26DRM 9" x 9" x 2 1/2"

Wt: 0.5 lb.



25BS

- Canvas with snap and leather tie attachment.

No. 25BS 8" x 9" x 2 1/2"

Wt: 0.5 lb.



25PLS

- An all leather bag with reinforced top.
- Snap and leather tie attachment.

No. 25PLS 8" x 9" x 3"

Wt: 0.9 lb.



25KLBS

- Durable leather with snap and leather tie attachment.

No. 25KLBS 8" x 9" x 2 1/2"

Wt: 0.8 lb.



25PS

- Wide opening canvas bag with leather bottom.
- Snap and leather tie attachment.

No. 25PS 8" x 8" x 2 1/2"

Wt: 0.6 lb.



26L

26LX

26L

- Very heavy, durable leather.
- Features a double top to stay open.
- Leather tie attachment.

No. 26L 9" x 9" x 2 1/2"

Wt: 0.7 lb.

No. 26LX 9" x 9" x 2 1/2"

Wt: 0.7 lb.



25R

- Cotton duck bag with 1" straps and leather ties.
- Reinforced top to keep open.

No. 25R 8" x 8 1/2" x 4"

Wt: 0.5 lb.



26G

- A soft leather bag with snap closure and adjustable leather straps.

No. 26G 8 1/2" x 9"

Wt: 0.5 lb.

LINEMEN'S HOLSTERS

Bashlin manufactures only premium holsters for tool belts. They feature double harness leather backs reinforced for extra wear. All holsters come with the hardware necessary for proper attachment.



111HS



111HSX

3 POCKET HOLSTER

For pliers, rule, screwdriver, and knife or wrench.

No. 111HS Natural
No. 111HSX Black

Wt: 1.0 lb.
Wt: 1.0 lb.



111HLS



111HLSX

4 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, and knife or wrench.

No. 111HLS Natural
No. 111HLSX Black

Wt: 1.25 lb.
Wt: 1.25 lb.



111HLDS



111HLDSX

5 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench.

No. 111HLDS Natural
No. 111HLDSX Black

Wt: 1.5 lb.
Wt: 1.5 lb.



111HE



111HEX

3 POCKET HOLSTER AND KNIFE SHEATH

For pliers, rule, screwdriver, and knife.

No. 111HE Natural
No. 111HEX Black

Wt: 1.25 lb.
Wt: 1.25 lb.



111HLE



111HLEX

4 POCKET HOLSTER AND KNIFE SHEATH

For pliers, screwdriver, Channellock®, rule, and knife.

No. 111HLE Natural
No. 111HLEX Black

Wt: 1.5 lb.
Wt: 1.5 lb.



111HLDSE



111HLDSE

5 POCKET HOLSTER AND KNIFE SHEATH

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife and wrench.

No. 111HLDSE Natural
No. 111HLDSE Black

Wt: 1.75 lb.
Wt: 1.75 lb.

LINEMEN'S SHORT BACK SERIES HOLSTERS

Designed for use with Bashlin EZ RIDER and EZ RIDER LITE series climbing belts. Can make reaching tools a little easier.



111HLS-S



111HLSX-S



111HLDS-S



111HLDSX-S

SHORT BACK 4 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, and knife or wrench.

No. 111HLS-S Natural

Wt: 1.0 lb.

No. 111HLSX-S Black

Wt: 1.0 lb.

SHORT BACK 5 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench.

No. 111HLDS-S Natural

Wt: 1.25 lb.

No. 111HLDSX-S Black

Wt: 1.25 lb.

111F SERIES TOOL HOLSTERS

These holsters have two snap hooks for easy attachment or removal from the 88FFX4D Flex-Fit series tool belts.



111FLSX



111FLEX



111FLDSX



111FLSXE

4 POCKET FLEX HOLSTER

For pliers, rule, screwdriver, Channellock®, and knife or wrench.

No. 111FLSX Black

Wt: 1.25 lb.

No. 111FLEX With knife holster

Wt: 1.50 lb.

5 POCKET FLEX HOLSTER

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench.

No. 111FLDSX Black

Wt: 1.50 lb.

No. 111FLSXE With knife sheath

Wt: 1.75 lb.

LINEMEN'S HOLSTERS



111SK



111SKX

SKINNING KNIFE HOLSTER

No. 111SK

Brown

Wt: 0.75 lb.

No. 111SKX

Black

Wt: 0.75 lb.



4HP

BASHLIN HOLSTER PACK

- Contains two rivet type screws, one small D-Ring, and piece of leather (black or brown) to attach tool holster to belt.

4HP

Natural

Wt: 0.1 lb.

4HPX

Black

Wt: 0.1 lb.



111BWH



111BWHX

BELL WRENCH HOLDER

No. 111BWH

Brown

Wt: 0.6 lb.

No. 111BWHX

Black

Wt: 0.6 lb.



4STR

4 SCREW TYPE RIVETS TO SECURE HOLSTER TO BELT

4STR

Screw type rivets

Wt: 0.05 lb.



111LWH



111LWHX

LOWELL WRENCH HOLDER

No. 111LWH

Natural

Wt: 0.6 lb.

No. 111LWHX

Black

Wt: 0.6 lb.



Left handed holsters are available at no extra cost.
(Add an "-LH" to the part number when ordering.)

GROUNDMAN HOLSTER ACCESSORIES - CARE



112HLS



112HLSX

GROUNDMEN'S HOLSTER

Bashlin's 4 pocket slotted groundmen's holster can comfortably hold your pliers, rule, screwdriver, knife, channellock, or wrench. **Do not use on linemen's tool belts**

No. 112HLS	Natural	Wt: 1.0 lb.
No. 112HLSX	Black	Wt: 1.0 lb.



33



33L

HANDLINE CARRIER

The nylon handline carrier fits over the tongue-buckle section of the belt. It is designed to straighten and drop the rope if the handline becomes snagged. The 33L locks on the belt.

No. 33	Handline carrier	Wt: 0.1 lb.
No. 33L	Handline carrier with lock	Wt: 0.1 lb.



31LX



31L



31R

TAPE SLINGS

These swivel bar tape slings will fit any size tape roll. For black - add "X" to part number.

No. 31L	Loop type	Wt: 0.1 lb.
No. 31R	Rivet type	Wt: 0.1 lb.



WARNING: Do not use groundmen's or electrician's holsters on linemen's tool belts.



32A



32AR



32B



32BR



32AX



32ARX



32BX



32BRX

LOOP-N-SNAP

These convenient extra snaps will fit 2" belts. For black - add "X" to part number.

No. 32A	Small snap for knives	Wt: 0.2 lb.
No. 32AR	Small snap with screw rivets	Wt: 0.2 lb.
No. 32B	Large snap for wrenches	Wt: 0.3 lb.
No. 32BR	Large snap with screw rivets	Wt: 0.3 lb.

806-32

806-16

806-8



804

809

LEATHER MAINTENANCE PRODUCTS

Long life for your leather products begins with proper care. Use Saddle Soap to clean the dirt out of the leather, then coat the leather to protect them with "Neatsfoot" or Mink Oil.

No. 804	Saddle Soap	Wt: .75 lb.
No. 806-8	Neatsfoot Oil (8 oz.)	Wt: .50 lb.
No. 806-16	Neatsfoot Oil (16 oz.)	Wt: 1.0 lb.
No. 806-32	Neatsfoot Oil (32 oz.)	Wt: 2.0 lb.
No. 809	Mink Oil	Wt: .30 lb.

POLE CLIMBERS



Pads in all climber kits will be black.

BD14B ALUMINUM

- Lightweight aluminum climber.
- Features replaceable gaffs.
- Weighs the same as comparable titanium climbers.
- Offset design gives great climbing qualities.
- Gaff guards included.

No. BD14B-1N	Aluminum alloy with bottom straps.	Wt: 3.50 lb.
No. BD14B-2N	Bottom straps and top straps.	Wt: 4.25 lb.
No. BD14B-3N	Bottom straps, top straps and #110DX pads.	Wt: 5.25 lb.



**Natural Aluminum
BD14B**



**Black Anodized
BD14BX**



**OD Green Anodized
BD14BOD**

No. BD14B-4N	Bottom straps, top straps and #130DX pads.	Wt: 5.50 lb.
No. BD14B-5N	Bottom straps, top straps and #140DSX pads.	Wt: 5.75 lb.
No. BD14BP-1N	For CCA poles - polished gaffs	Wt: 3.5 lb.
No. BD14BA-1N	Longer top slide (18"-21").	Wt: 3.50 lb.

BD16B STEEL

- Our most popular steel alloy climber.
- Features replaceable gaffs.
- Extra ankle room for added comfort.
- Offset design gives great climbing qualities.
- Gaff guards included.

No. BD16B-1N	Steel alloy, straight shanks with bottom straps.	Wt: 5.0 lb.
No. BD16B-2N	Bottom straps and top straps.	Wt: 6.0 lb.
No. BD16B-3N	Bottom straps and #110DX pads.	Wt: 6.5 lb.



BD16B

No. BD16B-4N	Bottom straps, top straps and #130DX pads.	Wt: 6.75 lb.
No. BD16B-5N	Bottom straps, top straps and #140DSX pads.	Wt: 7.0 lb.
No. BD16BP-1N	For CCA poles - polished gaffs.	Wt: 5.0 lb.
No. BD16BA-1N	Longer top slide (18"-21").	Wt: 5.0 lb.

BD16BC TWISTED SHANK STEEL

- Durable steel alloy climber.
- Features replaceable gaffs.
- Has a 3° twisted shank so the climber lays flat against the leg.
- Extra ankle room like the BD16B.
- Gaff guards included.

No. BD16BC-1N	Steel alloy, twisted shank with bottom straps.	Wt: 5.0 lb.
No. BD16BC-2N	Bottom straps and top straps.	Wt: 6.0 lb.
No. BD16BC-3N	Bottom straps, top straps and #110DX pads.	Wt: 6.5 lb.



BD16BC

No. BD16BC-4N	Bottom straps, top straps and #130DX pads.	Wt: 7.0 lb.
No. BD16BC-5N	Bottom straps, top straps and #140DSX pads.	Wt: 7.0 lb.
No. BD16BCP-1N	For CCA poles - polished gaffs.	Wt: 5.0 lb.
No. BD16BCA-1N	Longer top slide (18"-21").	Wt: 5.0 lb.



All Bashlin Climbers feature Bashlin's superior performing 17° gaff. Gaff Guards and a Gaff Gauge are included with Bashlin Climbers. The standard top slide length has an adjustment of 15"-18". There are longer top slides available, with an adjustment of 18"-21" (A).

POLE CLIMBERS

BD12 STEEL

- Lightweight, steel alloy climber.
- Features riveted non-replaceable gaffs.
- Excellent climbing characteristics.
- Offset design places gaff in proper position for easier penetration.
- Gaff guards included.



No. BD12-1N	Steel alloy with bottom straps.	Wt: 5.0 lb.	No. BD12-4N	Bottom straps, top straps and #130DX pads.	Wt: 6.25 lb.
No. BD12-2N	Bottom straps and top straps.	Wt: 5.5 lb.	No. BD12-5N	Bottom straps, top straps and #140DSX pads.	Wt: 6.5 lb.
No. BD12-3N	Bottom straps, top straps and #110DX pads.	Wt: 6.0 lb.	No. BD12P-1N	For CCA poles - polished gaffs.	Wt: 5.0 lb.
			No. BD12A-1N	Longer top slide (18"-21").	Wt: 5.0 lb.

BD12C TWISTED SHANK STEEL

- This steel alloy climber is an excellent value.
- Features a riveted non-replaceable gaff.
- Has a 3° twisted shank so the climbers lay flat against the leg.
- Offset design places gaff in proper position for easier penetration.
- Gaff guards included.



No. BD12C-1N	Steel alloy, twisted shank with bottom straps.	Wt: 5.0 lb.	No. BD12C-4N	Bottom straps, top straps and #130DX pads.	Wt: 6.25 lb.
No. BD12C-2N	Bottom straps and top straps.	Wt: 5.5 lb.	No. BD12C-5N	Bottom straps, top straps and #140DSX pads.	Wt: 6.5 lb.
No. BD12C-3N	Bottom straps, top straps and #110DX pads.	Wt: 6.0 lb.	No. BD12CP-1N	For CCA poles - polished gaffs.	Wt: 5.0 lb.
			No. BD12CA-1N	Longer top slide (18"-21").	Wt: 5.0 lb.

BD12L STEEL

- Steel alloy climber.
- Features a riveted non-replaceable gaff.
- Has a narrower stirrup, it measures 3 3/4", the standard measurement is 4 3/4".
- Offset design places gaff in proper position for easier penetration.
- Gaff guards included.



No. BD12L-1N	Steel alloy, narrow stirrup with bottom straps.	Wt: 5.0 lb.	No. BD12L-4N	Bottom straps, top straps and #130DX pads.	Wt: 6.25 lb.
No. BD12L-2N	Bottom straps and top straps.	Wt: 5.5 lb.	No. BD12L-5N	Bottom straps, top straps and #140DSX pads.	Wt: 6.5 lb.
No. BD12L-3N	Bottom straps, top straps and #110DX pads.	Wt: 6.0 lb.	No. BD12LP-1N	For CCA poles - polished gaffs.	Wt: 5.0 lb.
			No. BD12LA-1N	Longer top slide (18"-21").	Wt: 5.0 lb.

TREE CLIMBERS

Available in lightweight aluminum and steel. Bashlin tree climbers offer the same trusted comfort, durability and reliability as our pole climbers.

- 2 -1/2" replaceable gaff to penetrate thick bark.
- Standard Top Slide (15"-18") included.
- Longer Top Slides (18"-21") available.
- Leather gaff guards included.

BD14BT SERIES ALUMINUM TREE CLIMBERS

- Lightweight aluminum alloy.
- Weighs the same as comparable titanium climbers.
- Offset design for superior climbing qualities.
- Replaceable gaffs.

No. BD14BT-1N	Aluminum alloy with bottom straps.	Wt. 3.50 lb.
No. BD14BT-2N	Aluminum alloy with top and bottom straps.	Wt. 4.75 lb.
No. BD14BT-3N	Aluminum alloy with top straps, bottom straps, and #110DX pads.	Wt. 5.25 lb.
No. BD14BT-4N	Aluminum alloy with top straps, bottom straps, and #130DX pads.	Wt. 5.50 lb.
No. BD14BT-5N	Aluminum alloy with top straps, bottom straps, and #140DSX pads.	Wt. 5.75 lb.



**Natural
BD14BT**



**Black
Anodized
BD14BTX**



**OD Green
BD14BTOD**

BD16BT SERIES STEEL TREE CLIMBERS

- Durable steel alloy.
- Extra ankle room for added comfort.
- Offset design for superior climbing qualities.
- Replaceable gaffs.

No. BD16BT-1N	Steel with bottom straps.	Wt. 5.00 lb.
No. BD16BT-2N	Steel alloy with top and bottom straps.	Wt. 5.50 lb.
No. BD16BT-3N	Steel alloy with top straps, bottom straps, and #110DX pads.	Wt. 6.00 lb.
No. BD16BT-4N	Steel alloy with top straps, bottom straps, and #130DX pads.	Wt. 6.25 lb.
No. BD16BT-5N	Steel alloy with top straps, bottom straps, and #140DSX pads.	Wt. 6.25 lb.



No. BD16BT-1N

BD16BCT SERIES STEEL TREE CLIMBERS

- Durable steel alloy.
- Has a 3° twisted shank so the climber lays flat against the leg.
- Extra ankle room for added comfort.
- Offset design for superior climbing qualities.
- Replaceable gaffs.

No. BD16BCT-1N	Steel with bottom straps.	Wt. 5.00 lb.
No. BD16BCT-2N	Steel alloy with top and bottom straps.	Wt. 5.50 lb.
No. BD16BCT-3N	Steel alloy with top straps, bottom straps, and #110DX pads.	Wt. 6.00 lb.
No. BD16BCT-4N	Steel alloy with top straps, bottom straps, and #130DX pads.	Wt. 6.25 lb.
No. BD16BCT-5N	Steel alloy with top straps, bottom straps, and #140DSX pads.	Wt. 6.50 lb.



No. BD16BCT-1N

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



CLIMBER PADS

SPUR-STAY CLIMBER PADS

Developed by a local lineman over 50 years ago, Bashlin introduced the 105 series "Spur-Stay" climber pads with metal inserts for the lineman looking for comfort and shank control.

The Spur-Stay design allows the climber to adjust the position of the shank, and eliminates "kick-back". It is available with straps or Hook-N-Loop closures.



145BCV

145ACV/145BCV/145FCV

This Hook-N-Loop cinch closure pad has deep padding, moisture wicking mesh, and an angled metal insert.

No. 145ACV	For BD16B series and BD12 series climbers	Wt. 3.2 lb.
No. 145BCV	For BD14 climbers	Wt. 3.2 lb.
No. 145FCV	For BD14B climbers	Wt. 3.2 lb.



145AC

145BC

145AC/145BC/145FC

This Durable Leather "wide" climber pad has moisture wicking padding, metal insert and top climber straps.

**** 2 pairs of straps included with pads ****

No. 145AC	For BD16B series and BD12 series climbers	Wt. 3.3 lb.
No. 145BC	For BD14 climbers	Wt. 3.3 lb.
No. 145FC	For BD14B climbers	Wt. 3.3 lb.



145BCVW

145ACVW/145BCVW/145FCVW

This "wide" pad combines the Hook-N-Loop cinch closure pad combined with sturdy leathers, moisture wicking padding, and angled metal inserts to provide added comfort.

No. 145ACVW	For BD16B series and BD12 series climbers	Wt. 3.6 lb.
No. 145BCVW	For BD14 climbers	Wt. 3.6 lb.
No. 145FCVW	For BD14B climbers	Wt. 3.6 lb.



105BC



105FCX

105AC/105BC/105FCX

This is the original Spur-Stay design. It is lightweight, yet provides comfort and total climber control.

No. 105AC	For BD16B series and BD12 series climbers	Wt. 1.5 lb.
No. 105BC	For BD14 climbers	Wt. 1.5 lb.
No. 105FCX	For BD14B climbers	Wt. 1.5 lb.



Replacement Irons add "R" to the above part numbers. Sold in pairs.



For climber pads with "straight" metal inserts drop "C" from above part number.

CLIMBER PADS



150V

150V - HOOK-N-LOOP PADS

- Constructed from woven nylon with a soft padding sewn inside.
- Hook-N-Loop closure for extra security.
- Leather tunnel loop to keep the pad in place on the climber.

No. 150V Hook-N-Loop with "T" design Wt: 1.8 lb.



130D



130DX

130D


- Bashlin's original "L" pad.
- Constructed from durable russet leather.
- Light padding for comfort, while still keeping the pad lightweight.
- Allows shank movement for linemen that prefer less restriction.

No. 130D Natural padded

Wt: 0.7 lb.

No. 130DX Black padded

Wt: 0.7 lb.

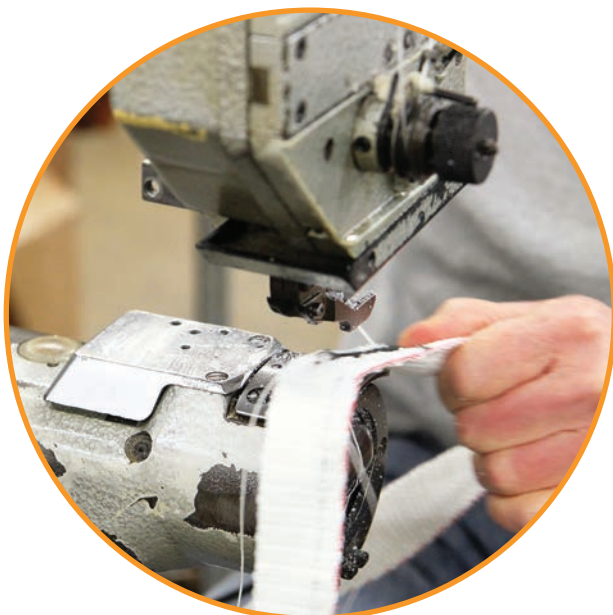

140DS



140DX

140D SERIES

- Constructed from durable russet leather.
- Wing design holds the shank securely, and at a slight angle for enhanced control.
- Climber shank fits inside the pad, to add comfort while reducing movement.
- The shank area is available with or without padding.

No. 140D Natural

Wt: 0.8 lb.

No. 140DS Natural padded

Wt: 1.25 lb.

No. 140DX Black

Wt: 0.8 lb.

No. 140DSX Black padded

Wt: 1.25 lb.

CLIMBER PARTS AND ACCESSORIES



85N - 24"



89N - 28"



87N - 28"



85 NPX

CLIMBER STRAPS

- Constructed from durable, pliable, and comfortable neoprene nylon (N) or flexible "Bioplastic" coated webbing (NP).
- Double riveted and feature a protective buckle shield.

TOP CLIMBER STRAPS

No. 85N	1 1/16"x24"	Wt: 0.6 lb.
No. 85NP	1 1/16"x24"	Wt: 0.6 lb.
No. 85NPX	1 1/16"x24" Black	Wt: 0.6 lb.
No. 86N	1 1/16"x28"	Wt: 0.6 lb.
No. 86NP	1 1/16"x28"	Wt: 0.6 lb.
No. 86NPX	1 1/16"x28" Black	Wt: 0.6 lb.

BOTTOM STRAPS

No. 87N	1 1/16"x28" two piece	Wt: 0.7 lb.
No. 87NP	1 1/16"x28" two piece	Wt: 0.7 lb.
No. 87NPX	1 1/16"x28" two piece Black	Wt: 0.7 lb.
No. 89N	1 1/16"x28" two piece split ring	Wt: 0.7 lb.
No. 89NP	1 1/16"x28" two piece split ring Black	Wt: 0.7 lb.
No. 89NPX	1 1/16"x28" two piece split ring Black	Wt: 0.7 lb.



14TSB



14ATSB



16TS



16ATS

TOP SLIDES (screws are included)

- Fits all Bashlin climbers.
- The standard adjustment is 15"-18".
- There are longer top slides available, with an adjustment of 18"-21".
- Order according to your climbers.

No. 14TSB For BD14B, 15"-18"

Wt: 0.6 lb.

No. 14ATSB For BD14B, 18"-21"

Wt: 0.85 lb.

No. 16TS For BD16B, BD12, 15"-21"

Wt: 0.6 lb.

No. 16ATS For BD16B, BD12, 18"-21"

Wt: 0.85 lb.

No. 14TS For BD14, 15"-18"

Wt: 0.6 lb.

No. 14ATS For BD14, 18"-21"

Wt: 0.85 lb.

SCREWS



3

CLIMBER STRAP SPLIT RING

No. 3 Split ring for climber straps (package of 2)

Wt: 0.15 lb.



4G



4T

- Screws are small and easy to lose.
- Bashlin offers replacement screws for gaffs and top slides.


No. 4G Gaff screws

Wt: .05 lb.

No. 4T Top slide screws

Wt: .05 lb.

CLIMBER PARTS AND ACCESSORIES

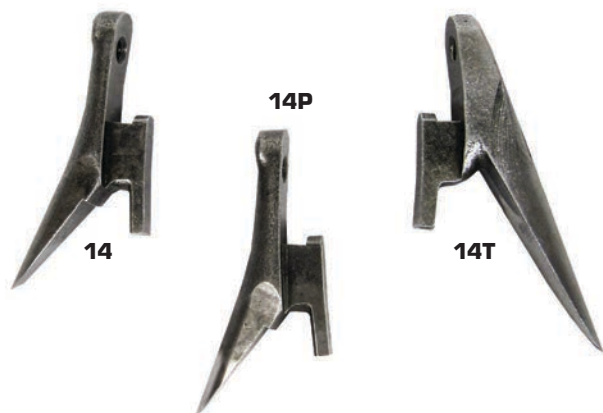

REPLACEMENT GAFFS

- Fits the BD14, BD14B, BD16B, and BD16BC climbers.
- The standard 14 gaff is 1 5/8" long.
- The 14P gaff is 1 5/8" and had the machine marks removed for easier penetration on hard/CCA poles.
- Includes new gaff screws (4G).

No. 14	1 5/8" pole gaffs	Wt: 0.5 lb.
No. 14P	1 5/8" polished pole gaffs	Wt: 0.5 lb.
No. 14T	2 1/2" tree gaffs	Wt: 0.6 lb.


***Only Bashlin Replacement Gaffs may be used on Bashlin Climbers.**



GAFF SHAPING KIT

- Nice compact design.
- Contains all of the tools needed to properly care for the gaffs on your Bashlin climbers.
- Includes #5 gaff gauge, 6" mill file with wooden handle, sharpening stone, and instructions.
- For use with Bashlin pole gaffs only.

No. 27	Gaff shaping kit	Wt: 0.55 lb.
---------------	------------------	--------------



GAFF GAUGE

- For use with Bashlin pole climbers only.
- Used to maintain the correct shape, taper, and profile of your gaffs.
- Shaping instructions are included.

No. 5	Gaff gauge	Wt: 0.2 lb.
--------------	------------	-------------



GAFF GUARDS

- Helps keep the gaff protected.
- Helps to protect the user from scratches and puncture wounds.
- Sold in pairs.

No. 2	Standard leather guard with Hook-N-Loop	Wt: 0.2 lb.
No. 2SC	Deluxe leather guard with Hook-N-Loop attachment	Wt: 0.25 lb.
No. B1972G	Snap on guard for replaceable gaffs	Wt: 0.2 lb.
No. B1972F	Snap on guard for fixed gaffs	Wt: 0.2 lb.



HEEL COVER

- Wearing a pair of climbers exposes the lineman's ankle and Achilles tendon to potential injury.
- Covers this vulnerable area, while not restricting any movement.
- They are light, durable, and easily attach to any standard climber.

No. BHP	One size fits most, sold as pair	Wt: .5 lb.
----------------	----------------------------------	------------

FALL RESTRICTING DEVICE



HARDENED INNER ROPE ROLLERS ARE DURABLE AND ALLOW GREATER MOBILITY ON THE POLE.



BIGGER HANDLES ARE EASIER TO GRIP.



NEW ROPE CLAMP ALLOWS POLE ROPE REPLACEMENT IN THE FIELD.



THE PATRIOT™

New and unique design that frees the lineman from the “Tyranny and Restriction” of other fall restraint products.

- Easy, natural movement up and down the pole.
- Light weight - over 20% lighter than other devices.
- Easy movement and light weight=less fatigue for the climber.
- Rope rollers allow freedom of movement left and right while working.
- Easily adapts for left and right handed climbers.



Video is available on our website or scan the QR code

No. 76PAT 6" - 20" diameter poles

Wt: 3.5 lb.

No. 76PAT-T 6" - 30" diameter poles

Wt: 3.5 lb.

REPLACEMENT PARTS

No. 76PAT-ORC Includes replacement pole rope and rope clamp

Wt: 1.0 lb.

No. 76PAT-OR Includes replacement rope

Wt: .75 lb.



AS A RESULT OF INDEPENDENT TESTING THE PATRIOT HAS BEEN CLASSIFIED AS “ERGONOMIST APPROVED”.

It's 3.5 lb. weight is less than the 4 lb. weight threshold determined by ergonomist studies to cause damaging repetitive motion strains.

The Patriot reduces stress on the arms and shoulders and potential repetitive strain injuries caused by climbing with other Fall Restraint Devices.

*The Patriot meets ASTM F887 Type A/B requirement, including icy or slippery poles.



WARNING: The carabiners, connector slot and connector latch should be free from debris, open easily and close completely. Verify all connections. The rope clamp should have no signs of stress, no loose screws, nor indicate movement of the line. The red wear indicators of the black outer line, or the red/white/blue inner line should not be visible. If your Patriot has any of these discrepancies, it must be removed from service.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



ADJUSTABLE ROPE POSITIONING LANYARDS



4019NXBC-8



4019UX-8

4016 LANYARDS - STANDARD ADJUSTOR

No. 4016NX-8	PVC wear cover	Wt. 2.35 lb.
No. 4016NXBC-8	Ballistic nylon wear cover	Wt. 2.35 lb.
No. 4016UX-8	Parallel Core	Wt. 2.35 lb.
No. 4016NX-8SW	PVC cover/swivel snap	Wt. 2.40 lb.
No. 4016NXBC-8SW	Ballistic nylon/swivel snap	Wt. 2.40 lb.
No. 4016UX-8SW	Parallel Core/swivel snap	Wt. 2.40 lb.
No. 4016NX-8AL	PVC/aluminum hook	Wt. 2.15 lb.
No. 4016NXBC-8AL	Ballistic/aluminum hook	Wt. 2.15 lb.
No. 4016UX-8AL	Parallel Core/aluminum hook	Wt. 2.15 lb.

4019 LANYARDS - 90° TWIST

No. 4019NX-8	PVC wear cover	Wt. 2.35 lb.
No. 4019NXBC-8	Ballistic nylon wear cover	Wt. 2.35 lb.
No. 4019UX-8	Parallel Core	Wt. 1.50 lb.
No. 4019NX-8SW	PVC cover/swivel snap	Wt. 2.40 lb.
No. 4019NXBC-8SW	Ballistic nylon/swivel snap	Wt. 2.40 lb.
No. 4019UX-8SW	Parallel Core/swivel snap	Wt. 2.40 lb.
No. 4019NX-8AL	PVC/aluminum hook	Wt. 2.15 lb.
No. 4019NXBC-8AL	Ballistic/aluminum hook	Wt. 2.15 lb.
No. 4019UX-8AL	Parallel Core/aluminum hook	Wt. 2.15 lb.



4018TX-8AL

Constructed with 11.5MM Kernmantle Rope, "RAD" device, and an aluminum snap hook. The abrasion and cut resistance of the "TECHNORA" over-braid eliminates the need for additional wear jackets or PVC covers. The "RAD" (Rope Adjustment Device) features an internal breaking system and spring loaded flip out handle which allows for easy one hand operation.

No. 4018TX-8AL

Wt. 2.25 lb.



4019TX-8AL

Constructed with 11.5MM Kernmantle Rope, 90° twist stop adjuster and an aluminum snap hook, this device will hold up under challenging conditions. The abrasion and cut resistance of the "TECHNORA" over-braid eliminates the need for additional wear jackets or PVC covers.

No. 4019TX-8AL

Wt. 1.80 lb.

ADJUSTABLE ROPE POSITIONING LANYARDS

- Bashlin's Rope Lanyards for transitioning obstacles when climbing or descending poles are available in several materials with multiple wear protection, adjuster, and snap-hook options.
- Twist lock aluminum carabiner is standard on adjusters.
- Rope options (all have red core for inspection).

16 STRAND POLYESTER ARBORIST ROPE

16 strand polyester rope is an excellent choice due to its no snagging, abrasion-resistant construction and excellent energy absorption characteristics.

PARALLEL CORE POLYESTER

Parallel-core polyester filament bonded together with a rubber based adhesive, wrapped with red rubber tape to act as a wear indicator, and over-braided with a tough polyester sleeve.

TECHNORA OVER-BRAIDED KERNMANTLE ROPE

TECHNORA rope is engineered with superior durability and ease of inspection in mind. The modified "TECHNORA" over-braid is designed to maximize cut and abrasion resistance. Inside, you'll find a modified Kernmantle construction. The red polyester sub-sleeve is easily identifiable if the rope becomes compromised due to wear and tear. If the red damage indicator is exposed, just remember - "Red-Is-No-Go!"



ADJUSTOR CHOICES

- 4016 Style-standard or straight cam
- 4019 Style-90 degree twist cam



ROPE CONSTRUCTION (ALL HAVE RED CORES FOR INSPECTION)

- Braided rope with PVC cover (NX) **(A)**
- Braided rope with Ballistic nylon/rope roller (NXBC) **(B)**
- Parallel Core **(C)**
- Technora Over-Braided Kernmantle **(D)**



SNAPHOOKS

- Standard steel **(1)**
- Steel swivel snaphook (SW) **(2)**
- Aluminum alloy (AL) **(3)**



WARNING:

Verify connections and red wear indicator.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



POLE STRAPS



51N-2HL

50 SERIES



The 6 ply 1 3/4" neoprene coated nylon material uses a tongue buckle adjustment, and has a red wear indicator.

Part No.	Length		Wt:
No. 51N-2HL	5'6"	Pole strap	3.75 lb.
No. 52N-2HL	6'	Pole strap	3.75 lb.
No. 53N-2HL	6'6"	Pole strap	4.0 lb.
No. 54N-2HL	7'	Pole strap	4.0 lb.



78XX-2HL

78 SERIES



Bashlin's pliable latigo leather straps feature a nylon insert. The stitching is deeply embedded in the leather for longer wear.

Part No.	Length		Wt:
No. 78XX-2HL	5'6"	Pole strap	4.25 lb.
No. 78AX-2HL	6'	Pole strap	4.25 lb.
No. 78BX-2HL	6'6"	Pole strap	4.5 lb.
No. 78CX-2HL	7'	Pole strap	4.5 lb.

WARNING: Always visually confirm that the snap is on the D-Ring with the gate closed and locked before allowing the strap to support your body weight. Do not just listen for the "click".



47N-15

EXTENSION STRAPS



Bashlin's extension straps are made from 6 ply nylon and forged steel hardware. The available lengths are 15" and 18".

Part No.	Length		Wt:
No. 47N-15	15"	Extension strap	1.0 lb.
No. 47N-18	18"	Extension strap	1.0 lb.



41NW-2HL

40NW SERIES

The orange woven nylon is soft, pliable, and has a red wear indicator in the center. Adjustment is made with a forged steel friction adjuster.

Part No.	Length		Wt:
No. 41NW-2HL	5'6"	Pole strap	3.5 lb.
No. 42NW-2HL	6'	Pole strap	3.5 lb.
No. 43NW-2HL	6'6"	Pole strap	4.0 lb.
No. 44NW-2HL	7'	Pole strap	4.0 lb.

WARNING: Double action locking snaphooks reduce, but do not eliminate, the possibility of accidental disengagement. Caution and proper work methods including keeping the Snap/ D-Ring area free from foreign objects must be practiced at all times. Disabling the gate locks may cause accidents, injury, or death.

WARNING: The 40 and 50 series straps have red wear indicators in the center to help determine when it is time to replace them.

HAND TOOLS



RAUCKMAN'S BUG WRENCHES

RAUCKMAN™
Utility Products

- See through port to confirm that the ends are separated.

No. BW221	3/8" - 9/16"	Wt: 0.75 lb.
No. BW2212*	1/2" - 9/16"	Wt: 0.75 lb.
No. BW223	Stamped metal, insulating handle, 9/16" and 3/4"	Wt: 0.75 lb.
No. BW223HD	Heavy-duty, drop-forged, insulating handle, 9/16" and 3/4"	Wt: 0.75 lb.
No. BW2237*	5/8" - 3/4"	Wt: 0.75 lb.
No. BW224*	3/4" - 7/8"	Wt: 0.75 lb.
No. BW244	Heavy-duty, 4-in 1, drop-forged, insulating handle, reversing ratchet, 5/8" and 1/2" - 9/16" and 3/4"	Wt: 0.75 lb.

*Not shown



KLEIN ADJUSTABLE WRENCHES

- Heavy duty wrenches are made of steel alloy.
- Feature an extra capacity design.
- Plastic dipped handles.

No. D507-8	8" length and 1 1/8" capacity	Wt: 1.0 lb.
No. D507-10	10" length and 1 5/16" capacity	Wt: 1.0 lb.
No. D507-12	12" length and 1 1/2" capacity	Wt: 1.5 lb.



LOWELL LINEMEN'S WRENCHES

- Square socket fits 3/4", 1", 1 1/8".
- Hex end fits 9/16", 3/4", and 5/8" square nuts.
- Reversing lever at head.
- Bolt-thru design.

No. 100TDE	8 1/4" ergo grip	Wt: 1.5 lb.
No. 101TDE	9 1/4" steel handle	Wt: 2.0 lb.
No. 103TDE	12 1/4" steel handle	Wt: 2.25 lb.

TRIPLE SQUARE

- 3/4", 1", 1-1/8"

No. 150-12	12" steel handle	Wt: 2.5 lb.
-------------------	------------------	-------------

QUAD WRENCH

- 3/4", 13/16", 1", 1 1/8"

No. 8D	12" ergo handle	Wt: 1.5 lb.
---------------	-----------------	-------------

Bashlin offers the complete line of Lowell products. Contact us for more information.



KLEIN "BELL" LINEMEN'S WRENCH

No. 3146	5/8" hardware	Wt: 2.0 lb.
-----------------	---------------	-------------

HAND TOOLS



D213-9NE



D2000-9NE



D2000-9NETH

LINEMEN'S PLIERS

- Made in the U.S.A.
- Designed for professional use.
- Plastic dipped handles.

No. D213-9NE	Klein's most popular (9")	Wt: 1.25 lb.
No. D2000-9NE	Klein hardened jaws (9")	Wt: 1.25 lb.
No. D2000-9NETH	Klein with 5/8" thread cleaners	Wt: 1.25 lb.



420G



430G

ADJUSTABLE PLIERS

- The original Channellock® plier.
- Made in the exact same standards that earned it a quality reputation.

No. 420G	9 1/2" with coated handles	Wt: 1.0 lb.
No. 430G	10" with coated handles	Wt: 1.0 lb.



BSK25



BSK30



BSK50

LINEMEN'S SKINNING KNIVES

- Curved point skinning knives.

No. BSK25	9 1/4" OAL	Wt: 0.5 lb.
No. BSK30	10" OAL	Wt: 0.5 lb.
No. BSK50	For shotgun stick, 10" OAL	Wt: 0.5 lb.



BSK22



BSK23



BSK52



BSK52 ON STICK

COMFORT GRIP SKINNING KNIVES

No. BSK22	9 1/2" OAL	Wt: 0.4 lb.
No. BSK23	Blunted Tip 9 1/2" OAL	Wt: 0.4 lb.
No. BSK52	Blunted Tip For shotgun and hot stick 11 1/2" OAL	Wt: 0.5 lb.



1550-4



44005

KLEIN FOLDING LINEMEN'S KNIFE

- 2.5" hardened locking blades.

No. 1550-4	Wood grain plastic with ring	Wt: 1.0 lb.
No. 44005	Impact-resistant handle with rubber insert	Wt: 0.5 lb.

HAND TOOLS



HAMMERS

No. B6232	Vaughn line hammer	Wt: 2.0 lb.
No. B832	Klein claw hammer	Wt: 2.5 lb.
No. B809	Klein double face hammer	Wt: 2.5 lb.
No. B832-26	Klein waffle hammer	Wt: 2.5 lb.



KLEIN SCREWDRIVERS

- Features a square shank, keystone tip, cushion grip.


No. 600-4	8 11/32" OAL, 1/4" tip width and 4" shank	Wt: 0.4 lb.
No. 600-6	10 15/16" OAL, 5/16" tip width and 6" shank	Wt: 0.5 lb.
No. 600-8	13 7/16" OAL, 3/8" tip width and 8" shank	Wt: 0.6 lb.
No. 600-12	17 7/16" OAL, 1/2" tip width and 12" shank	Wt: 1.0 lb.
No. 602-7DD	7" round shank demo driver	Wt: 0.5 lb.



STAPLE STICKS

- Makes driving staples safer and more efficient.
- Simply load 12 staples ahead of time and hammer them through when needed.
- There is no fumbling, and the risk of a glove puncture is minimized.

No. BSS2000	Staple stick for 3/4" staples	Wt: 0.5 lb.
No. BSS2001	Staple stick for 1" staples	Wt: 0.5 lb.

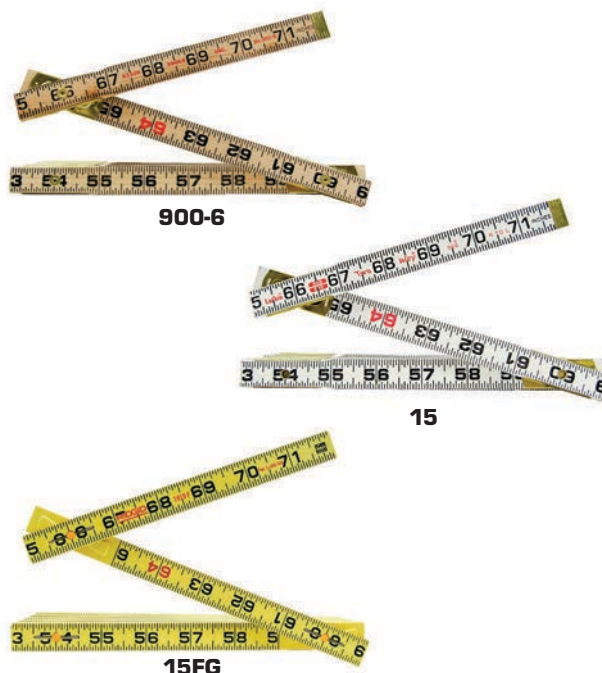

FOLDING RULES

- Features either an inside read or an outside read.

No. 900-6	Klein 6' inside read wood	Wt: 0.3 lb.
No. 15	Lufkin 6' dual read wood	Wt: 0.3 lb.
No. 15FG	Rigid 6' inside read fiberglass	Wt: 0.3 lb.

EQUIPMENT INSPECTION

Bashlin's Climbing Equipment is to be inspected before each use. If in the course of your inspection any of your tools are found to be defective, they must be removed from service immediately. Follow your company procedures for replacement. If there are any questions, please contact us. Properly maintaining your equipment is an investment in your well-being.



HOW TO INSPECT YOUR EQUIPMENT

Here are the components of your equipment that need to be carefully inspected. Remove any product from service that has any of the following conditions.

TOOL BELTS

(ESTIMATED SERVICE LIFE 5-8 YEARS)

- (A)** Hardware-electrical burns, cracks, deformation, loose attachment points.
- (B)** Sewing-loose, cut, broken or frayed stitches.
- (C)** Leather or Nylon material-Abrasion, fraying, cracking, cuts or chemical deterioration.
- (D)** Rivets-loose or bent rivets.
- (E)** Tool loops-holsters-bug bags-elongated loops, loose attachments, cut straps, worn bag bottoms.
- (F)** Belt tongue-broken stitches, elongated holes, worn or abraded material.

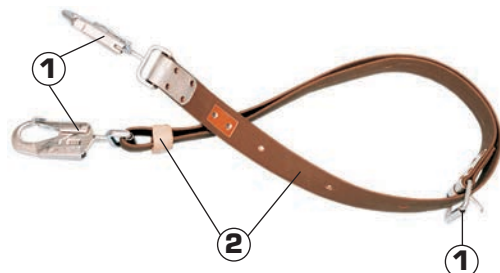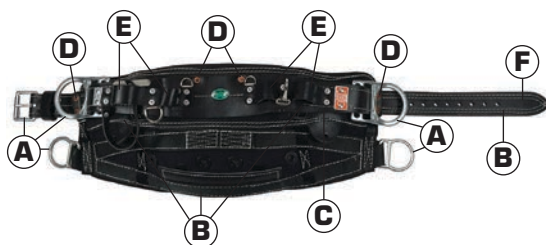

FALL RESTRAINTS/POLE STRAPS/SECONDARY LANYARDS

(ESTIMATED SERVICE LIFE 1 - 4 YEARS)

- (1)** Hardware-electrical burns, cracks, bends, deformation, loose attachment, improper latch movement and gate spring tension, sticking adjuster cams or carabiner gates, loose set screws.
- (2)** Nylon, leather or rope-abrasion that exposes red wear indicator, cuts, fraying, broken stitches, chemical damage.



CLIMBERS

(ESTIMATED SERVICE LIFE IS WHEN 2ND SET OF GAFFS HAVE WORN OUT)

- (A)** Straps and pads-cuts, extreme abrasion, elongated holes, loose attachment points, chemical damage.
- (B)** Shank-electrical burns, cracks, deformation, worn stirrup (thinning), improper slide adjustment. Careful inspection is required to the "critical" portion of the climber shank, 4-8" above the gaff attachment point. Scratches and cuts in this section may cause stress risers, accelerate wear and allow the shank to fail prematurely.
- (C)** Gaffs-loose attachment, electrical burns, and incorrect shape. See Bashlin Information booklet BLCL514 for gaff shaping information, or go to www.bashlin.com and see the gaff shaping video.



Additional detailed information is available by request or online or see page 106.

NOTES:

**"SUPERIOR PRODUCTS
REQUIRE VISION AND
SKILLED HANDS."**

-W.M. BASHLIN, 1926





BASHLIN
INDUSTRIES INC
UP / DOWN / ALL AROUND INNOVATION

FALL PROTECTION AND RESCUE EQUIPMENT FOR LINeworkERS AND GENERAL INDUSTRY

Bashlin Industries, Inc. offers field proven products and innovative engineered solutions for all your fall protection needs. Our products meet the ASTM, ANSI and OSHA requirements, including Arc Flash resistant harnesses and lanyards. In fact, we were one of the first companies to participate in the testing leading to the current ASTM Arc Flash standards.

FALL PROTECTION EQUIPMENT GENERAL INFORMATION

BASIC COMPONENTS OF FALL PROTECTION EQUIPMENT:

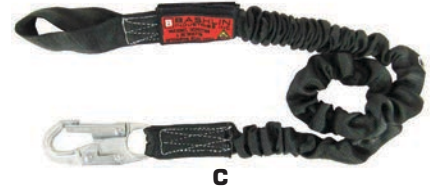

A. ANCHORAGE/ANCHORAGE CONNECTORS:

A secure point that will endure the force of arresting a worker's fall. In most situations OSHA requires a strength rating of 5,000 lb. or more for a single worker's anchorage.

B. HARNESS:

A device made of webbing, buckles, and D-Rings designed to hold the worker securely, distribute arresting forces, and provide a point to attach a lanyard connecting the individual to an anchorage.

C. LANYARD:

A web product connecting the worker to the anchorage. It must include a shock absorbing device for fall arrest applications.

D. CONNECTING DEVICES:

Snaphooks, carabiners, and D-Rings that link the various components of the personal fall protection equipment.

FALL PROTECTION EQUIPMENT CRITERIA

Bashlin expands on these basic ideas for the specific desires of our customers. The big question is, what do you need? Here are some things to consider:

ANCHORAGE/ANCHORAGE CONNECTORS:

- Does it have the required strength?
- Can it be easily accessed? Will the lanyards and fall lines remain clear of tangles and damaging edges?
- Are the connections and combinations of the hardware compatible to reduce the possibility of accidental disengagement or damage in an arrested fall?
- Are the connections close and as directly above the user as possible, and high enough to keep the worker from striking a lower level during an arrested fall?

LANYARDS

- Are the lanyards as short as possible (6' maximum)?
- Does the free-fall distance comply with OSHA requirements?
- Do the connections to the anchorage and harness comply with industry standards?
- Is a shock absorber required or necessary?

HARNESSES

- What are the OSHA requirements for the work situation?
- Does the work require positioning capabilities or only fall arrest?
- Can or will the fall protection equipment be used to aid in the rescue of a worker?

INSPECT BEFORE EACH USE.

PROPER USE AND CARE OF HARNESSES

- Read, understand, and follow all instructional material included with or attached to these products.
- Do not use these products without proper training.
- Check that all buckle hardware and closures are aligned properly, are free from damage, and are functioning properly.
- Harness should be properly sized to the individual user. See page 43 for sizing chart.
- Adjust harness to obtain a “snug” fit by adjusting friction adjusters and buckles on shoulder and leg straps. When adjusted correctly the back attachment should be located between the shoulder blades of the user.
- Utilize elastic bands and plastic keepers to control excess webbing after adjustments are made.
- Avoid exposing safety harness to excessive heat, chemicals, and prolonged exposure to sunlight that can degrade the materials.

CARING FOR YOUR HARNESS

Proper care for your harness is quick and easy by simply following these guidelines.

CLEANING

“Hand Washing” is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

STORAGE

Store Harness in a ventilated area protected from moisture, heat, chemicals, and UV Light. Bashlin's 10HBT harness bag is a great storage option.



10HBT

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



Lanyard Parking Tab

ANSI Z359.11-2021 ANSI Z359 Recognizes the use of this harness only within the capacity range of: 130-310 lbs.		 Model: 883XC Size: X-Large Material: Nylon D.O.M.: 10/20/22 Serial: 20022103042 Max. Capacity: 350 lbs. ANSI Z359.11-2021 ANSI Z359.11-2021 ASTM F887-20																																	
		 Owner's Name: _____																																	
Inspection Record <table border="1"> <thead> <tr> <th>DATE</th> <th>INSPECTED BY</th> <th>STATUS</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>		DATE	INSPECTED BY	STATUS																															WARNING READ AND FOLLOW THE MANUFACTURER'S INSTRUCTIONS INCLUDED WITH THE EQUIPMENT AT THE TIME OF PURCHASE FROM THE MANUFACTURER. PROPER TRAINING IS REQUIRED PRIOR TO USE. INSPECT PRIOR TO EACH USE. DO NOT ALTER OR REPAIR. DO NOT USE IF THERE IS ANY SIGN OF ABUSE, EXCESSIVE WEAR OR CORROSION. USE ONLY COMPATIBLE CONNECTIONS FOR ANCHORAGES AND OTHER CONNECTING COMPONENTS OF A PERSONAL FALL ARREST SYSTEM.
DATE	INSPECTED BY	STATUS																																	

AVOID SHARP EDGES, ABRASIVE SURFACES, EXPOSURE TO ACIDS AND PROLONGED SUNLIGHT. PARK HARNESSED LANYARD ONLY ON LANYARD PARKING POINT OF HARNESS. LIMIT FREE FALL DISTANCE TO THE LENGTH OF THE LANYARD OR A FEET WHICHEVER IS LESS. ALLOW FOR A MAXIMUM EXTENSION OF 4FT OVER THE STATED LENGTH OF THE LANYARD.



NYLON HARNESS EXPOSED TO ARC FLASH



UNDAMAGED UNDERSIDE OF SAME WEBBING

INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion or chemical degradation.
- “Visual indicators” are intact and have not been deployed.

If any of the above issues are detected, remove product from service immediately.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



BASHLIN HARNESSSES are available in the X or H design. The X (683) models are sized. The H (662) are one size fits most.

BASHLIN HARNESSSES AND LANYARDS ARE ASTM ARC FLASH COMPLIANT AND THIRD PARTY TESTED.



683X



662



BASHLIN'S NON-CONDUCTIVE BUCKLES, ADJUSTORS AND SNAPHOOKS ARE RATED AT 9KV.

X-STYLE & H-STYLE

BACK
ATTACHMENT
OPTIONS



ALUMINUM D-RING (D2)



DIELECTRIC D-RING (D1)



STANDARD D-RING (D)



NYLON WEB LOOP (A)



2' NYLON LOOP
EXTENSION (B)
No. 1900



2' SMALL D-RING
EXTENSION (C)
No. 1991



6' NYLON WEB LOOP
WITH SMALL D-RING (C6)

OPTIONS AVAILABLE (NOT PICTURED):

LW06B: 6' with B-LAN shock absorber

LWA6B: 6' adjustable with B-LAN shock absorber

L2805-4HL: 4' or 6' (6HL) polyester core/tubular web shock absorber

ARC FLASH HARNESS OPTIONS

X-STYLE

H-STYLE

HOW TO CORRECTLY CHOOSE BODY HARNESS OPTIONS:

- Choose a base harness style (ex.: **683X**)
- Choose a back attachment(s) (ex.: **683XA**)
- Choose other harness options (ex.: **683XAP**)
- Choose a size (ex.: **683XAP-L**)



SHOULDER
D-RINGS (S)



DIELECTRIC
BUCKLES (DEQ)



SHOULDER PADS (N)



NYLON WEB LOOPS
ON SHOULDERS (T)



SHOULDER/BACK
PAD COMBO (X)



QUICK RELEASE
BUCKLES (Q) (PREFIX)



REFLECTIVE MATERIAL
ON WEBBING (G)



656 SERIES POSITIONING
BELT (D-SIZE REQUIRED) (P)



LEATHER
BUCKLE PAD (F)



NEOPRENE
BUCKLE PADS (G)



COATED
HARDWARE (E)



RESCUE LOOPS
ON CHEST (R)



ReSTEP SUSPENSION
TRAUMA DEVICE (R2)


SIZING CHART - BASED ON HEIGHT AND CHEST SIZE

X-STYLE 683 AND H-STYLE 662H-662V-664A-664T

SIZE		HEIGHT	CHEST
S	Small	5' 4" - 5' 7"	36 in.
M	Medium	5' 8" - 5' 11"	40 in.
L	Large	6' 0" - 6' 3"	44 in.
X	X-Large	6' 3" - 6' 6"	48 in.
2XL	XX-Large	6' 6" +	52 in.
3XL	XXX-Large	6' 6" +	56 in.

H STYLE HARNESSES-662R AND 662A

SIZE		HEIGHT	CHEST
0	One Size Fits Most	5' 4" - 6' 3"	48 in.
X	X-Large	6' 3" - 6' 6"	54 in.
2X	XX-Large	6' 6" - 6' 10"	60 in.

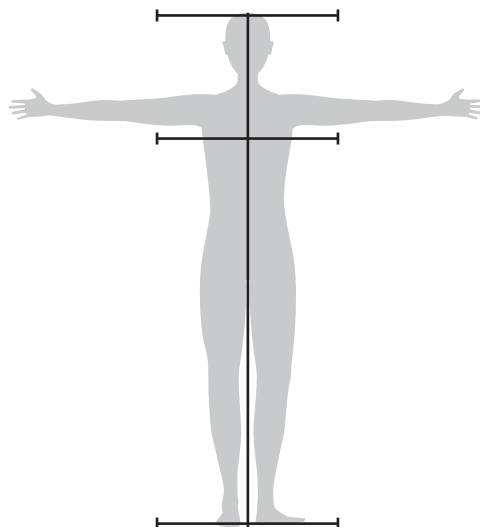

AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSES

683 "X" STYLE SERIES



The 683 "X" is Bashlin's premier body harness. Originally designed for the utility industry, this harness sets the standard for comfort, flexibility and ease of use. The hardware is low on the waist, and a loop is in the front for rescue or work positioning. Available with pass through friction buckles or quick release buckles. [Size required, see page 43.](#)

 **BASHLIN'S HARNESSES MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED**



683XD

"X" HARNESS WITH D-RING BACK ATTACHMENT

- X-Style full body harness.
- 3" D-Ring.

No. 683XD Pass through buckles
No. 683GD Grommet leg straps

Wt. 4.0 lb.
Wt. 4.5 lb.



683XC

"X" HARNESS WITH 24" EXTENSION BACK ATTACHMENT

- X-Style full body harness.
- Pass through buckles.
- Available with or without 2" D-Ring.
- Use only with lanyards that are 4' or less.

No. 683XB 24" extension with nylon loop Wt. 4.5 lb.
No. 683XC 24" extension with D-Ring Wt. 4.5 lb.



683XA

"X" HARNESS WITH NYLON LOOP BACK ATTACHMENT

- X-Style full body harness.
- 3" nylon loop for lanyard attachment.

No. 683XA Pass through buckles
No. 683GA Grommet leg straps with
pass through buckles

Wt. 4.0 lb.
Wt. 4.5 lb.



Shown with
additional
options
BQ683XA

"X" HARNESS B683X BLACK OUT SERIES

- X-Style full body harness.
- Black webbing with orange stitching.

No. B683XA With nylon loop Wt. 4.5 lb.
No. B683XD With D-Ring Wt. 4.5 lb.

AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSES

662 "H" STYLE SERIES



The 662 Series is a fully adjustable, one size fits most full body harness, in the "H" style. This harness also has a dorsal seat strap and 8,500 lb. test web. [Size required, see page 43.](#)



662RD

"H" HARNESS WITH D-RING BACK ATTACHMENT

- H-Style full body harness.
- Pass through buckles.

No. 662AD	Moveable chest strap	Wt. 4.0 lb.
No. 662RD	Fixed chest strap	Wt. 4.0 lb.
No. 662GD	Moveable chest strap and grommet legs	Wt. 4.5 lb.



Shown with
additional
options
BQ662A

"H" HARNESS B662A BLACK OUT SERIES

- 662 H-Style harness in black webbing and orange stitching.
- Moveable chest strap with pass through buckles.
- Size required, see page 43.

No. B662AA	With nylon loop	Wt. 4.5 lb.
No. B662AD	With D-Ring	Wt. 4.5 lb.



662AC

"H" HARNESS WITH 24" EXTENSION BACK ATTACHMENT

- H-Style full body harness.
- Pass through buckles.
- Available with or without 2" D-Ring.
- Use only with lanyards that are 4' or less.

No. 662AB	With loop end	Wt. 4.5 lb.
No. 662AC	With D-Ring	Wt. 4.5 lb.



662RA

"H" HARNESS WITH NYLON LOOP BACK ATTACHMENT

- H-Style full body harness.
- 3" nylon web loop.

No. 662AA	Moveable chest strap	Wt. 4.5 lb.
No. 662RA	Fixed chest strap	Wt. 4.0 lb.
No. 662GA	Moveable chest strap and grommet legs	Wt. 4.5 lb.



DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE
ON ALL BASHLIN HARNESSES (Q).

AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSES



662VA

"H" HARNESS 662VA

- H-Style full body harness with a nylon "A" loop or D-Ring back attachment.
- Hook-N-Loop chest closure with pass through friction buckles.
- Sized as an X-Style harness (S-2X). See page 43.

No. 662VA	Pass through buckles with nylon loop	Wt. 4.0 lb.
No. 662VD	Pass through buckles with D-Ring	Wt. 4.0 lb.



NOTES:

DIELECTRIC HARNESSSES



Bashlin's X-Style and H-Style harnesses are available with dielectric buckles and snap hooks constructed with nylon molded over heat treated alloy steel to produce a minimum rating of 9kV. Lanyards are also available. [Size required, see page 43.](#)



DEQ683XA



DEQ662HA

"X" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Size required, see page 43.

No. DEQ683XA Nylon web loop
No. DEQ683XD1 Dielectric D-Ring

Wt. 3.5 lb.
 Wt. 4.5 lb.

"H" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Size required, see page 43.

No. DEQ662HA Nylon web loop
No. DEQ662HD1 Dielectric D-Ring

Wt. 4.0 lb.
 Wt. 4.5 lb.



DEQ664A

"H" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Rapid adjusters on shoulders.
- Size required, see page 43.

No. DEQ664A Dielectric D-Ring

Wt. 4.5 lb.





Q664T H STYLE CLIMBING HARNESS

**BASHLIN HARNESSES
AND LANYARDS ARE
ARC FLASH COMPLIANT
AND MANUFACTURED
IN ACCORDANCE TO
THE APPROPRIATE
OSHA, ASTM AND ANSI
STANDARDS**

- Integrated 4 D-ring padded in-line climbing belt with lightweight aluminum D-rings for comfort and support.
- Moveable chest strap.
- Available with nylon "A" loop, steel D-ring, dielectric D-ring, or 24" extension for back attachment.
- Quick Connect buckles on chest and leg straps.
- Rapid adjuster on chest.
- Rescue loops on hips.
- Black webbing with orange stitching.

No. Q664T-Size Climbing Harness

Wt. 8.0 lb.

SIZE CHART

Small	D18-D21	Medium D22-D25
Large	D26-D28	X-Large D29-D32



USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



CLIMBING, SUBSTATION, AND TOWER HARNESSSES



Shown with additional
options Q662ZACGR2X.

Q662ZA SERIES: ZEUS "H" STYLE ARC FLASH FULL BODY HARNESS

- At just 7.5 lbs. this full body H-Style harness has an integral stacked 4 D-Ring belt with aluminum D-Rings, quick release buckles, and moisture wicking pad.
- Rescue loops on chest.
- Sizes as follows: Small (S) D18-21; Medium (M) D22-25; Large (L) D26-28; X-Large (X) D29-32.

No. Q662ZA Quick release buckles
with nylon loop **Wt. 7.5 lb.**

CALL US TO PLACE AN ORDER WITH ANY OF THE ADDITIONAL OPTIONS AVAILABLE:

- (A) Nylon loop dorsal attachment
- (C) 2' Extension
- (D2) Aluminum D-Ring
- (G) Neoprene buckle pads
- (R2) RESTEP Suspension Trauma Straps
- (X) Mesh shoulder/back pad



10HBT

HARNESS BAGS

- Store and protect your body harness from most mechanical, chemical and UV damage in this high visibility orange canvas bag.

No. 10HBT Harness bag **Wt. 1.0 lb.**



683XAP

Shown with
"X" Pad.



683 "X" STYLE CLIMBING HARNESS

- Available with 656CM tool belt.
- Belt easily removed from harness.
- Front attachment point for work positioning on ladders or rescue.
- Size both harness and tool belt "D" size.

No. 683XDP	With 3" D-Ring	Wt. 8.0 lb.
No. 683XAP	With nylon loop	Wt. 8.0 lb.
No. 683XBP	With 24" loop extension	Wt. 8.0 lb.
No. 683XCP	With 24" D-Ring extension	Wt. 8.0 lb.



FE683XEZTWR

FE683EZTWR TOWER HARNESS

- 683 X-Style harness with Steel D-Ring.
- Extra support and comfort EZ-Rider belt.
- Size both harness and tool belt "D" size.

No. FE683EZTWR Quick release buckles **Wt. 11.0 lb.**



DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE
ON ALL BASHLIN HARNESSSES (Q).

HARNESSES FOR CONFINED SPACE, RESCUE



BEDQ683XD1



BEDQ683XD1 "X" STYLE HARNESS

- Dielectric D-Ring with 18" nylon loop choked into D-Ring.
- Four "A" loops with reflexite (two on shoulders and two on hips).
- Leather buckle pads.
- Size required, see page 43.

No. **BEDQ683XD1** X-Style harness

Wt. 4.5 lb.



683XDT



CONFINED SPACE HARNESS

- Bashlin standard 683X and 662 H-Style harnesses for confined space entry are available with specialty options such as shoulder loops, hip loops, and high visibility material on webbing.
- Available in X-Style or H-Style.
- Pass through buckles standard.

No. **683XDT**

D-Ring, nylon shoulder loops

Wt. 4.0 lb.

No. **662ACS**

24" D-extension and
shoulder D-Rings

Wt. 5.0 lb.



BED662VDEF



BED662VDEF "H" STYLE HARNESS

- Dielectric D-Ring with 18" nylon loop choked into D-Ring.
- Four "A" loops with reflexite (two on shoulders and two on hips).
- Coated hardware.
- Leather buckle pads.
- Hook-N-Loop chest closure.
- Size required, see page 43.
- Use only with lanyards that are 4.5' or less.

No. **BED662VDEF** H-Style harness

Wt. 4.5 lb.



683X HARNESS OPTIONS (EX.):

683X STYLE HARNESS (683XC6EQT) WITH 6" EXTENSION, SMALL D-RING, COATED HARDWARE, REFLEXITE, AND NYLON SHOULDER LOOPS.

DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSES (Q).

LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



 BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED



2000 SERIES B-LAN SHOCK ABSORBING LANYARDS

The B-LAN shock absorber pack reduces shock forces to the user by drawing the nylon web through a compressed steel tube (as a result of a fall event).

The maximum and standard length of the 2000 series lanyard is 6'. Shorter lengths are available on request.



No. 2004NWB-6HL

Shock absorbing lanyard. 1" nylon web with B-LAN and two SL6650A rope snaphooks.

Wt. 2.5 lb.



No. 2005NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a loop end.

Wt. 2.0 lb.



No. 2005NWB-6DE

1" nylon web with B-LAN, a non-conductive dielectric snaphook, and a loop end.

Wt. 1.75 lb.



No. 2002NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a 5395A large ladder snaphook.

Wt. 3.0 lb.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED



2800 SERIES-POLYESTER SHOCK ABSORBING CORE

The 2800 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event.

The maximum and standard length of the 2800 series lanyard is 6'. Shorter lengths are available on request.



No. 2804-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core and two SL6650A snaphooks.

Wt. 2.5 lb.



No. 2805-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a loop end.

Wt. 2.0 lb.



No. 2805-6DE

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a non-conductive dielectric snaphook and a loop end.

Wt. 2.0 lb.



No. 2815-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 2.0 lb.



No. 2817-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 2.0 lb.



No. 2802-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 5395A large snaphook.

Wt. 3.5 lb.

LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED

2300 SERIES-POLYESTER SHOCK ABSORBING CORE WITH "STRETCH"

The 2300 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event. Elastic cord has been added to allow the lanyard to "stretch" and contract minimizing length while using. Standard length is 6'.



No. 2317-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005 carabiner.

Wt. 2.0 lb.



No. 2306-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core and two SL6650A snaphooks.

Wt. 2.5 lb.



No. 2302-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 5395A large ladder hook. Wt. 3.5 lb.



No. 2305-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snap hook, and a loop end.

Wt. 2.0 lb.



No. 2315-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 1.5 lb.



WARNING: Limiting the lanyard length to 6' will not ensure a free fall of 6' or less. The lanyard length, plus anchor point and work location together will determine the free fall distance.



DID YOU KNOW?

**BASHLIN LANYARDS ARE
AVAILABLE WITH THE FOLLOWING
OPTIONS AND FEATURES:**

- Forged steel snaphooks (SL6650A), steel carabiner (3005), aluminum carabiners (3005A), or large ladder snap (5395A).
- 1" nylon web, and 1" tubular web.
- Manufactured to ANSI, ASTM, and OSHA requirements.



BN9327 SERIES SELF-RETRACTING LANYARDS WITH SHOCK ABSORBER PACK

Bashlin self-retracting lanyards are designed to be lightweight and comfortable. These lanyards are available with durable steel or lightweight aluminum snaphooks and carabiners.

- 6' working length.
- 3/4" Kevlar webbing.
- Certified to ANSI Z359.14 Standard for Self-Retracting Devices.
- Arc flash tested

No. BN9327-6HL

Steel snaphook and carabiner

Wt. 2.95 lb.

No. BN9327-6AL

Aluminum snaphook and carabiner

Wt. 2.30 lb.



Q664TAX
with BN9327-6AL



No. 662RD
with No. BN9327-6HL



No. BN9327-6AL



No. BN9327-6HL

**CONTACT US FOR
MORE INFORMATION**

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



2-LEG LANYARDS FOR CLIMBING TOWERS



B-LAN SERIES

The B-LAN shock absorber pack reduces fall arrest forces in a fall event by drawing the nylon web through a compressed steel tube.

B-LAN STYLE - "Y" CLIMBING LANYARD



No. 2027-6HL

Twin leg climbing lanyard with nylon loop, two large steel ladder snaphooks, and B-LAN shock absorber.

Wt. 5.0 lb.



No. 2028-6HL

Twin leg climbing lanyard with steel rope snap, two large steel ladder hooks, and B-LAN shock absorber.


Wt. 5.0 lb.



No. 2028-6AL

Twin leg climbing lanyard with aluminum rope snap, two large aluminum ladder snaphooks, and B-LAN shock absorber.

Wt. 5.0 lb.



CAUTION: Lanyards may be connected to D-Rings on harnesses (D) with web/rope loops, and properly dimensioned carabiners or snaphooks. Nylon back attachments, (C) require web/rope loops or properly dimensioned carabiners. Snaphooks are not to be used with (C) attachment points. See page 58.



HITCHING A LANYARD TO A HARNESS.



Large ladder snap hooks have a 2.5" opening.

2-LEG LANYARDS FOR CLIMBING TOWERS



POLYESTER SHOCK ABSORBING CORE STYLE - "Y" CLIMBING LANYARD

The 2300/2800 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event. Standard length is 6'



No. 2327-6HL

Twin leg tubular nylon "stretch" climbing lanyard with nylon loop, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2827-6AL

Twin leg tubular nylon climbing lanyard with nylon loop, two large aluminum ladder snaphooks, and shock absorbing core.

Wt. 4.5 lb.



No. 2328-6HL

Twin leg tubular nylon "stretch" climbing lanyard with steel snap hook, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.5 lb.



No. 2328-6AL

Twin leg tubular nylon "stretch" climbing lanyard with aluminum snap hook, two large aluminum ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2827-6HL

Twin leg tubular nylon climbing lanyard with nylon loop, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2828-6HL

Twin leg tubular nylon climbing lanyard with steel snap hook, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.

POSITIONING LANYARDS



4000 SERIES – FIXED LENGTH POSITIONING LANYARDS

This series is designed for and mostly used in positioning applications. In certain situations they can be used for fall arrest, if they are used with a shock absorbing device and if all other applicable requirements are met.

The maximum and standard length of the 4000 series lanyard is 6'. Shorter lengths are available on request.



No. 4005NW-6HL

1" nylon web with SL6650A rope snaphook and one loop end.

Wt. 2.0 lb.



No. 4002NW-6HL

1" nylon web with SL6650A rope snaphook and 5395A large ladder snaphook on the ends.

Wt. 3.5 lb.



No. 4017NW-6HL

1" nylon web with SL6650A rope snaphook and 3005 steel carabiner on the ends.

Wt. 2.5 lb.



No. 4004NW-6HL

1" nylon web with SL6650A rope snaphooks on the ends.

Wt. 2.5 lb.




PROPER USE AND CARE OF LANYARDS

**ALWAYS INSPECT
YOUR EQUIPMENT
BEFORE EACH USE!**




A




B



C



D

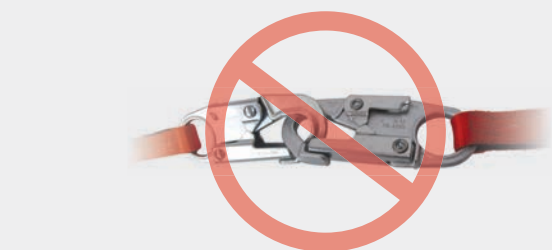


E



F



G



H



I

- Read, understand, and follow all instructional material included with or attached to these products. **(A)**
- Inspect before use.
- Make sure connector on end of lanyard is compatible with harness and anchor point and working properly. **(B)**
- Do not attach a snap hook directly into a nylon back attachment. **(C)** Use a locking carabiner or a lanyard that has loop at one end that can be "hitched" to the nylon loop. **(D)**

- Do not connect two lanyards together to make a lanyard as this will increase your free fall potential. **(E)**
- Do not use "knots" to shorten a lanyard as this will decrease the strength of the device by 30% or more. **(F)**
- Do not connect snap hook back into itself (boiler hitch). **(G)**
- Utilize parking tabs to store free end of lanyard to reduce tripping and entanglement hazards when walking. **(H)**
- Avoid dragging or allowing lanyards to lay on ground exposing it to chemical or mechanical damage.

INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion, or chemical degradation.
- "Shock" Load indicators are intact and have not been deployed.

If any of the above issues are detected, remove product from service immediately.

CARING FOR YOUR LANYARD

Proper care for your Lanyard is quick and easy by simply following these guidelines.

CLEANING

"Hand Washing" is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

STORAGE

Store Lanyard in a ventilated area protected from moisture, heat, chemicals, and UV light.

ANCHORAGES/CONNECTORS



BOOM STRAPS



- 8,500 lb. test nylon web.
- Nylon pads.
- Corrosion resistant.
- Standard length is 55"

No. 703	Boom strap with friction buckle	Wt. 2.0 lb.
No. 703R	Boom strap with ratchet	Wt. 3.5 lb.
No. 703R-2D	2 D-Ring boom strap for overcenter lifts	Wt. 4.5 lb.



WARNING: Bashlin boom straps, even those with 2 D-Rings are for one worker only. Each worker must have his/her own individual anchorage.



2011P-36G



2011P



2011P1



2012P

NYLON ANCHOR STRAPS



- Rated at 5,000 lb.
- Standard 3' or 4' lengths.
- Longer lengths are available on request.

No. 2011P-36	36" anchor strap with hardware	Wt. 1.75 lb.
No. 2011P-36G	36" anchor strap with hardware and softener.	Wt. 2.0 lb.
No. 2011P-48	48" anchor strap with hardware	Wt. 1.75 lb.
No. 2011P1-36	36" anchor strap	Wt. 1.0 lb.
No. 2011P1-48	48" anchor strap	Wt. 1.0 lb.
No. 2012P-36	36" anchor strap	Wt. 0.7 lb.
No. 2012P-48	48" anchor strap	Wt. 0.7 lb.



CAUTION: Nylon anchor straps require padding for protection over sharp edges.

HARDWARE/DESCENT DEVICES

CARABINERS



These are convenient connectors for many applications. Only triple locking carabiners are to be used for fall protection. Bashlin's carabiners are rated at a minimum of 5000 lb. (*OAL is overall length).



TRIPLE LOCK DESIGN FOR FALL PROTECTION SYSTEMS



No. 3006	Steel 5" OAL with 1" gate opening	Wt. 1.0 lb
No. 3007A	Aluminum 4 7/8" OAL with 7/8" gate opening	Wt. 0.3 lb.
No. 3008A	Aluminum 4 7/8" OAL with 7/8" gate opening	Wt. 0.3 lb.



TWIST LOCK AND SCREW LOCK CARABINERS

- For rescue and material handling.

No. 3006K	Steel twist lock 5" OAL with 1" opening	Wt. 0.9 lb.
No. 3004	Steel screw lock 5" OAL with 1 1/4" opening	Wt. 1.1 lb.



SL6650A

ROPE SNAPHOOKS



- Forged steel rated at a minimum of 5000 lb. and meeting the OSHA and ANSI standards.

No. SL6650A	5 9/16" OAL 3/4" gate opening	Wt. 0.5 lb.
--------------------	-------------------------------	-------------



5395A

LARGE SNAPHOOKS



- Forged steel rated at a minimum of 5000 lb. and meeting the OSHA and ANSI standards.

No. 5395A	9" OAL 2 1/2" gate opening	Wt. 2.0 lb.
------------------	----------------------------	-------------



DSD30

ROPE DESCENT DEVICES

No. DSD30	Skylotec double stop descender 11mm 7/16" static lines	Wt. 2.1 lb.
------------------	--	-------------



WARNING: This equipment is to be used by trained personnel only.

PROPER USE AND CARE OF ANCHORAGE CONNECTORS

- Inspect before use.
- Always place the anchor point as high as possible to reduce free fall distance and the chance that the worker could impact a lower level should a fall event occur.
- **DO NOT** use nylon web anchor slings around structures or objects with sharp edges unless softeners are used to protect the sling from sharp edges.

INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion, or chemical degradation.

If any of the above issues are detected, remove product from service immediately.

CARING FOR YOUR NYLON ANCHORAGE

Proper care for your Nylon Anchorage is quick and easy by simply following these guidelines.

CLEANING

“Hand Washing” is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

STORAGE

Store Nylon Anchor in a ventilated area protected from moisture, heat, chemicals, and UV light.

NOTES:

REST SERIES: RELIEF FOR SUSPENSION TRAUMA



ReST

REST - SUSPENSION TRAUMA DEVICE

- Designed to mitigate the debilitating and potentially fatal effects of suspension trauma.
- Ladder secures to the back attachment of the worker's harness for easy access and deployment.
- Easily deploys by pulling on yellow rung.

No. ReST Suspension trauma ladder Wt. 0.7 lb.



ReST-SR

REST SR - SUSPENSION TRAUMA RELIEF LADDER

- Self-deploying relief system.
- Ladder can provide the worker a means for either self-rescue, or at the very least a place to relieve the pressure on the leg as a result of hanging in the harness for an extended period of time after a fall event.
- Adjustable for use on 4' - 6' lanyards.
- Can be used on most lanyards.

No. ReST-SR Self-rescue ladder Wt. 1.2 lb.



ReSTeP



RESTeP SUSPENSION TRAUMA DEVICE

- Simple and easy device designed to help minimize and alleviate the damaging and potentially fatal effects of suspension trauma when a worker is exposed to a fall event and left suspended in a upright position.
- Easily attaches to most harnesses.

No. ReSTeP Suspension trauma device Wt. 0.5 lb.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



RESCUE EQUIPMENT



700FP



700FWI



700FWI (OPEN)

RESCUING INJURED WORKERS FROM AERIAL LIFT DEVICES

- Designed for use in aerial lift devices.
- 700FP attaches semi-permanently to the boom with a ratcheting boom strap.
- 700FWI is stored in a canister mounted directly on the truck body.
- Units feature corrosion resistant blocks with nylon sheaves and 75' of twisted rope. Other rope lengths are available on request.
- A carabiner is provided for attachment to the victim.
- Proper training is required to use these items.

 Video is available on our website or scan the QR code

No. 700FP	Boom mount rescue pack	Wt. 8.0 lb.
No. 700FWI	Truck mount rescue pack	Wt. 14.0 lb.



WRISTLETS

- Quick and easy way to move an injured worker.
- Nylon straps with 3" loops and soft felt padding.

No. 696NW	Wristlets	Wt. 0.5 lb.
------------------	-----------	-------------

AERIAL SELF RESCUE EQUIPMENT

PARA-PAK

The Para-Pak is a self contained kit for emergency evacuation from an elevated work area.

The basic device consists of a 3/8" Aramid fiber line packed into a low profile cartridge. 75' of line stores in an 10" x 10" pouch less than 2" thick.

It's much smaller and weighs less than similar products that use 1/2" synthetic line. The thin profile and light weight make this a very versatile and user friendly system.

PARA-PAK RESCUE KIT

- Combination of 683 harness, Para-Pak and lanyard.
- Requires the 683X Series harness to connect to the Para-Pak and a 6" back attachment point extension.
- The FR-Nomex Para-Pak includes a pre-rigged nylon ladder and clips to connect to the harness pad.
- Requires a lanyard that has a ring or loop for connecting to the rescue line.
- Can't be retrofitted on existing fall arrest harnesses or lanyards.

No. 683XC6	X-Style harness with 6" loop and D-Ring	Wt. 4.5 lb.
No. SR700XPL	Para-Pak with shoulder pad mounting system for harness	Wt. 2.5 lb.
No. SR2804-5.5HL	Lanyard with rescue ring	Wt. 2.5 lb.



AS SHOWN:
683XC6 AND
SR700XPL



Video is available on our website or scan the QR code



EMERGENCY SELF EVACUATION FROM AN AERIAL LIFT

SR PACK

- Evacuation or rescue from an elevated work area.
- Lightweight and easy to carry.
- Weather resistant pouch and has a mechanical descent device that will stop if the control is released.
- A harness with a front attachment is required.
- Other lengths available upon request

No. SRPACK-100AL	Rescue Pack (100 ft.)	Wt. 3.3 lb.
-------------------------	-----------------------	-------------



SRPACK-100AL

AERIAL SELF RESCUE EQUIPMENT



FE700SRKSC



FE700BMSRSC

AERIAL LIFT-SELF RESCUE

- Designed for personal evacuation from a stranded aerial lift.
- 50' of 7/16" dynamic double braid rope with an anchor eye spliced on one end, two carabiners, an DSD30 double stop descender and a carrying bag.
- Available as a boom-mount device.
- Proper training is required to use this item.
- Longer line is available.

No. FE700SRKSC Aerial self rescue kit

Wt. 5.0 lb.

No. FE700BMSRSC Boom mount rescue kit

Wt. 5.5 lb.



Video is available on our website
or scan the QR Code.



USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



NOTES:

**W.M. BASHLIN COMPANY BEGINS OPERATION
IN 1926, PROMISING "COMFORT, QUALITY
AND SAFETY" FOR THE PROFESSIONAL LINEMAN.**



BAGS, BUCKETS, AND TOOL CARRIERS

Bashlin Industries, Inc. has a wide assortment of tool carriers for utility work. We fabricate them from canvas, nylon, and durable synthetics. They are designed for all sorts of job applications to make your work easier.

GEAR BAGS, BACK PACKS AND TOOL BAGS

BACK PACK SERIES

- Made from coated polyester and canvas materials.
- These durable and versatile gear bags offer the user plenty of room for storage of tools and gear.
- Available in yellow, black, orange, and camo.
- Features high visibility orange canvas liner.
- Available with or without side zipper.



11BPD-B



11BPD-Y



11BPD-O

11BPD BACK PACK DUFFLE

- Interior lined with high visibility orange material making what you're looking for easy to find.
- Draw string closure with buckles to secure top cover.
- Padded back with adjustable shoulder straps and rubberized handle.
- Front Pocket: 16" x 16" x 4".

No. 11BPD-B	Black, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPD-C	Camo, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPD-O	Orange, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPD-Y	Yellow, 26"H x 50"C (around)	Wt. 6.0 lb.



11BPDZ-C

Contents not included

11BPDZ BACK PACK DUFFLE WITH ZIPPER

Bashlin's 11BPDZ Back Pack Duffel with durable 2-way zipper allows you to easily access your gear from the side as well as the top. The bright orange liner helps you find what you're looking for fast. Just like the original 11BPD, this rugged gear bag can be carried on the back as a back pack, slung over the shoulder, or suitcase style using the 2 heavy duty web handles. Other features include comfortable 2" padded shoulder straps with quick adjusting ladder lock style buckles, chest strap, back pad and large front pocket. The 11BPDZ will get all your gear to the job so you can get it done! Available in Camo, Orange, Yellow and Black.

No. 11BPDZ-B	Black, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPDZ-C	Camo, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPDZ-O	Orange, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPDZ-Y	Yellow, 26"H x 50"C (around)	Wt. 6.0 lb.

CUSTOM LOGOS AND MARKING

Contact customer service for more information about having your custom logo on our canvas and poly-coated products. There is no additional cost for making the product, simply a one time screen set up fee!



10S-14

10S SERIES

- This durable bag is made of heavy canvas.
- Constructed with a steel frame, polyester web handles, and either a reinforced coated polyester bottom or hard plastic bottom.

No. 10S-14	Small bag with hard plastic bottom 14" x 10 x 7"	Wt. 4.0 lb.
No. 10S-18	Mid-size bag with coated polyester bottom 18" x 12" x 9"	Wt. 5.0 lb.
No. 10S-22	Medium bag with coated polyester bottom 22" x 12" x 7"	Wt. 5.75 lb.
No. 10S-24	Large bag hard plastic bottom 24" x 12" x 7"	Wt. 5.75 lb.

GEAR BAGS, BACK PACKS AND TOOL BAGS



11DCS-B



11DCS

11DC SERIES

- Made of durable coated polyester.
- Nylon web handles.
- Hard plastic bottom and flap to cover the opening.
- The "S" model features a polyester web shoulder strap.
- Also available in black, yellow, orange and camo.

No. 11DC	24" x 19" x 11"	Wt. 8.0 lb.
No. 11DCS	With shoulder strap	Wt. 9.0 lb.



12S



12SS

12S SERIES

- This bag is made of canvas or coated polyester.
- It has a steel frame with polyester web handles and hard plastic bottom.
- Features inside and outside pockets.
- The "S" model features a polyester web shoulder strap.
- Also available in black, yellow, orange and camo.

No. 12S	22" x 13" x 11"	Wt. 8.0 lb.
No. 12SS	22" x 13" x 11" with shoulder strap	Wt. 9.0 lb.
No. 12SC	22" x 13" x 11" coated polyester	Wt. 8.0 lb.
No. 12SCS	22" x 13" x 11" coated polyester with shoulder strap	Wt. 9.0 lb.



DL11DC-RB-C



DL11DC-RB-O

DL11DC-RB SERIES: LARGE WHEEL "DRAG" BAG

- Has a hard plastic bottom and nylon web handles.
- Large 6" all terrain wheels.
- Features a flap to cover the opening when exposed to weather.
- Extendable handle.
- Available in black, yellow, orange and camo.

No. DL11DC-RB	24" x 19" x 11" bag on large wheels	Wt. 10.0 lb.
----------------------	--	--------------



DL11DC-R-B

DL11DC-R: ROLLER BAG

- Has a hard plastic bottom and nylon web handles.
- Features a flap to cover the opening when exposed to weather.
- Durable nylon wheels with an extendable handle.
- Available in black, yellow, orange and camo.

No. DL11DC-R	24" x 19" x 11" bag on wheels	Wt. 7.0 lb.
---------------------	-------------------------------	-------------

GLOVE/SLEEVE BAGS

**24M****24MC****24L****24LC****24LB****24LBC****24XL2P**

LINEMEN'S GLOVE BAGS

- Best way to ensure proper protection of rubber gloves.
- Constructed from durable canvas or coated polyester.
- Features a snap button closure and an attachment hook.
- Includes drain holes in the bottom.
- Available with a bellows opening which is wider at the top for easier storage.
- Two pocket bags are good for keeping high voltage and low voltage gloves separate.
- Add "C" to part number for coated bags.

No. 24M	Standard opening (10 1/2" gloves)	Wt. 0.5 lb.
No. 24	Standard opening (14" gloves)	Wt. 0.7 lb.
No. 24B	Bellows opening (14" gloves)	Wt. 0.7 lb.
No. 24L	Standard opening (16" gloves)	Wt. 0.7 lb.
No. 24LB	Bellows opening (16" gloves)	Wt. 0.8 lb.
No. 24XL	Standard opening (18" gloves)	Wt. 0.8 lb.
No. 24XLB	Bellows opening (18" gloves)	Wt. 0.8 lb.
No. 24L2P	2 pocket glove bag (16" gloves)	Wt. 1.10 lb.
No. 24XL2P	2 pocket glove bag (18" gloves)	Wt. 1.10 lb.

**24SLC****24SLV****24SLV**

LINEMEN'S SLEEVE BAGS

- Constructed from durable canvas or coated polyester.
- Hanging loop and attachment hook standard.
- Optional Snap button or Hook-N-Loop closure.

No. 24SL	Sleeve bag	Wt. 1.0 lb.
No. 24SLV	Hook-N-Loop closure sleeve bag	Wt. 1.0 lb.

**24SLGP-17****24SLGPC-17**

GLOVE/SLEEVE BAGS

- Standard size sleeve bag combined with the glove bag.
- Add "C" to part number for polyester coated bags
- Add a pocket for safety glasses by including "GP" in the part number.

No. 24SLGP-15	For 14" rubber gloves	Wt. 1.5 lb.
No. 24SLGP-17	For 16" rubber gloves	Wt. 1.6 lb.
No. 24SLGP-19	For 18" rubber gloves	Wt. 1.70 lb.

BLANKET BAGS, ROLLS, CANISTERS



24RBR-38



24RBR-38

BLANKET ROLLS

- Easy way to store and carry rubber blankets.
- Constructed from durable canvas with four blanket capacity.
- Features nylon snap closures and a nylon web carrying handle.

No. 24RBR-38	For 36" blankets	Wt. 1.5 lb.
No. 24RBR-47	For 46" blankets	Wt. 2.0 lb.



24RBC-38

BLANKET BAGS

- Blanket bags are made of heavy duty coated polyester. They have reinforced seams for added durability.

No. 24RBC-38	For 36" blankets	Wt. 1.10 lb.
No. 24RBC-47	For 46" blankets	Wt. 1.5 lb.



BC136-2 BC136-3 BC136-4

BLANKET CANISTERS

- Blanket canisters make storage easy while providing mechanical and contamination protection.
- Made of high impact polyethylene.

No. BC136-2	5" x 37" (capacity: 2)	Wt. 2.5 lb.
No. BC136-3	6" x 37" (capacity: 3)	Wt. 2.75 lb.
No. BC136-4	7" x 37" (capacity: 4)	Wt. 3.25 lb.
No. BC136-6	9" x 37" (capacity: 6)	Wt. 4.75 lb.



208-30 210-30

LINE HOSE BAGS

- Cotton bags that make handling and storage of line hose easier.
- Reinforced tops, and leather bottoms.

No. 208-30	8" x 30"	Wt. 2.0 lb.
No. 208-42	8" x 42"	Wt. 2.5 lb.
No. 208-48	8" x 48"	Wt. 3.0 lb.
No. 208-60	8" x 60"	Wt. 3.5 lb.
No. 210-30	10" x 30"	Wt. 3.0 lb.
No. 210-42	10" x 42"	Wt. 3.5 lb.
No. 210-48	10" x 48"	Wt. 4.0 lb.
No. 210-60	10" x 60"	Wt. 4.5 lb.
No. 212-30	12" x 30"	Wt. 3.5 lb.
No. 212-42	12" x 42"	Wt. 4.0 lb.
No. 212-48	12" x 48"	Wt. 4.5 lb.
No. 212-60	12" x 60"	Wt. 5.0 lb.

HOT STICK, GROUND SET BAGS



10S-24

10S SERIES

- This durable bag is made of heavy canvas.
- Includes a steel frame, polyester web handles and hard plastic bottom.

No. 10S-14	Small bag with hard plastic bottom 14" x 10 x 7"	Wt. 4.0 lb.
No. 10S-24	Large bag hard plastic bottom 24" x 12" x 7"	Wt. 5.75 lb.



24HSC

HOT STICK BAGS

- Protective bags that are made from coated polyester material and feature a snap button closure.
- Order according to the length of the stick and size as indicated with the stick description.

No. 24HSC-30	30" hot stick bag	Wt. 1.5 lb.
No. 24HSC-45	45" hot stick bag	Wt. 2.0 lb.
No. 24HSC-60	60" hot stick bag	Wt. 1.5 lb.
No. 24HSC-65	65" hot stick bag	Wt. 2.0 lb.
No. 24HSC-75	75" hot stick bag	Wt. 1.5 lb.
No. 24HSC-80	80" hot stick bag	Wt. 2.0 lb.
No. 24HSC-100	100" hot stick bag	Wt. 1.5 lb.
No. 24HSC-125	125" hot stick bag	Wt. 2.0 lb.
No. 24HSC-130	130" hot stick bag	Wt. 1.5 lb.
No. 270B	Rescue stick bag for #270	Wt. 2.0 lb.
No. 1967B	Bag for 1967RCP	Wt. 1.5 lb.

NOTES:

TOOL BUCKETS, HARNESS AND TOOL BAGS



TOOL BUCKETS

- Bashlin tool buckets are made of the highest quality materials for long life.
- Available in canvas or coated polyester and feature leather or plastic bottoms.
- Inside pockets are standard on the 23 series buckets.
- "LS" series buckets have no snaps.
- Add "C" for coated bags.

LEATHER BOTTOM:

No. 18	8" x 12"	Wt. 1.5 lb.
No. 18LS	8" x 12" - no snap	Wt. 1.25 lb.
No. 23	12" x 16"	Wt. 3.75 lb.
No. 23LS	12" x 16" - no snap	Wt. 3.5 lb.

PLASTIC BOTTOM:

No. 18P	8" x 12"	Wt. 1.5 lb.
No. 18P-O	8" x 12", orange	Wt. 1.5 lb.
No. 18LSP	8" x 12" - no snap	Wt. 1.25 lb.
No. 23P	12" x 16"	Wt. 3.75 lb.
No. 23LSP	12" x 16" - no snap	Wt. 3.5 lb.



706



706 (BACK)



706S



706S-BACK

700 SERIES: AERIAL BAGS

- Non-conductive frame to keep the bag open.
- Reinforced bottom.
- Ten inside pockets for tools.
- 14" x 7" x 10.

No. 706	Tool bag with PVC hooks	Wt. 3.0 lb.
No. 706S	Tool bag with rope and snap	Wt. 3.0 lb.



717



717-SIDE

717 SPLICER'S TOOL BAG

- Non-conductive frame to keep the bag open.
- Tool pockets inside and 14 outside pockets.
- Reinforced bottom.

No. 717	14 1/2" x 7" x 9 1/2"	Wt. 3.0 lb.
----------------	-----------------------	-------------

AERIAL TOOL BAGS AND TOOL CARRIERS



706-20

706-20

- 20" deep and has 10 inside pockets.
- Includes 712 hooks.

No. 706-20

14" x 7" x 20"

Wt. 3.25 lb.



721AM

722AM

TOOL BUCKET/BAG FOR "SHOOT ON" CONNECTORS

- Bashlin manufactures both a tool bucket and a bag for the "shoot on" connectors.
- Ample storage for the cartridges, the tool, as well as the connectors and wedges.
- Includes 712 hooks for hanging in bucket.
- The bucket includes a snap on the rope.
- Available in canvas or coated polyester.

No. 721AM

Tool bag (8" x 12", polyester) Wt. 2.0 lb.

No. 722AM

Tool bucket (8" x 12", polyester) Wt. 2.5 lb.

No. 723AM

Tool bucket (8" x 12", canvas) Wt. 2.0 lb.



726

COMPRESSION TOOL AND CUTTER BAG

- Three pocket coated polyester bag.
- Two pockets are for compression tools, one is for bolt cutters.
- Two PVC hooks are included.

No. 726

12" x 20"

Wt. 3.5 lb.



10HBT

HARNESS BAGS

- Store and protect your body harness from most mechanical, chemical and UV damage in this high visibility orange canvas bag.

No. 10HBT

Harness bag

Wt. 1.0 lb.

TOOL BOARDS

TOOL CARRIERS

Bashlin's tool boards are made of ABS. This light, durable material does not fray or flake and has superior cold weather characteristics. These boards are built and arranged with the worker in mind. They save precious space in the bucket and keep the tools in a handy position.



708



708L

HAMMER/HAND TOOLS/ BOLTS AND NUTS

- This is our original tool board. It remains a popular design with many utilities.
- 18" x 20".
- Features a 4 pocket tool holster, knife sheath, tool loops, and leather or canvas nut and bolt bag.

No. 708	With 25B bag	Wt. 6.25 lb.
No. 708L	With 26L bag	Wt. 7.0 lb.



708S

HAND TOOLS/PRUNING SAW/ BOLT CUTTER

- A pruning saw, more tools and cutter can be easily carried on this board.
- The #26R canvas bag has extra reinforcement for extended wear.
- 18" x 20".

No. 708S	With 26R bag	Wt. 8.5 lb.
-----------------	--------------	-------------



708-2

COMPRESSION TOOL/BITS/ HAND TOOLS

- This board holds a variety of most often used tools.
- Holds speed wrenches, hammers, compression tools, and a light.
- 18" x 20".

No. 708-2	With 726 and 25B bags	Wt. 7.0 lb.
------------------	-----------------------	-------------



708ID

HAND TOOLS/DRIVERS

- This aerial lift tool board complements our popular 708 Tool Board Series.
- Designed by Niagara Mohawk, it is perfect for aerial lifts that use an impact driver and need a convenient socket holder.
- Carries 6, 1/2" drive sockets on the tool board. It firmly holds the sockets with extra long socket stems that can accommodate all deep well sockets.

No. 708ID	With 25B Bag	Wt. 14.0 lb.
------------------	--------------	--------------

TOOL BOARD/TOOL TRAY



708G

708G

- Includes spaces for drill bits, drivers, and the Lowell wrench.
- 18" x 20".

No. 708G Tool board with 26L bag Wt. 12.0 lb.



708B

BLANK TOOL BOARD

- Blank ABS tool boards allowing you to customize a tool board to suit your needs.
- 18" x 20".

No. 708B Blank tool board Wt. 4.0 lb.



724

TOOL APRON

- Made from yellow heavyweight coated polyester.
- It has socket pockets, 2 pockets for auger bits, a hammer loop, and 2 large pockets for bolts, nuts and connectors.
- 2 PVC hooks are included.
- 23 7/8" x 21 1/4"

No. 724 Tool apron Wt. 5.0 lb.



727-L

TOOL TRAY

- This tool tray features an adjustable mount and smooth molded construction.
- 6" x 14" x 7 1/2".

No. 727-L Tool tray Wt. 8.0 lb.



712

712-2

712-3



712P

712P-3

712CE-3

HOOKS

- PVC and polymer hooks for hanging bags and tool aprons.

No. 712	PVC-3" buckets	Wt. 0.21 lb.
No. 712-2	PVC-standard buckets	Wt. 0.21 lb.
No. 712-3	PVC-3" lip buckets	Wt. 0.21 lb.
No. 712P	Polymer-standard buckets	Wt. 0.31 lb.
No. 712P-3	Polymer-3" lip buckets	Wt. 0.31 lb.
No. 712CE-3	Polymer 3" lip buckets	Wt. 0.31 lb.




700BK

BUCKET KNUCKLE

- Tool holding and organization bracket designed to suspend and separate tools inside an aerial device.
- Durable UHMW plastic.
- Measures 19 3/4" x 3" x 2 1/2".
- Hang from two standard bucket hooks (not included).
- Made in USA.

No. 700BK Bucket knuckle Wt. 1.5 lb.

SAFETY HOOK/BUCKET COVER

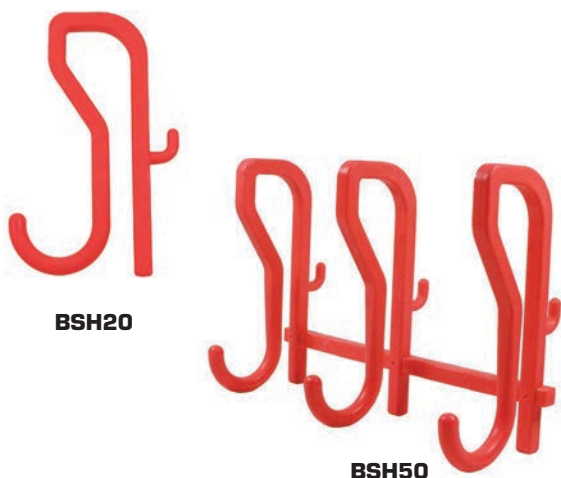

BSH20

BSH50

SAFETY HOOK

- Rugged hook with a break strength in excess of 250 lb.
- It will safely replace many hooks formed from #8 copper hanging on line trucks everywhere.

No. BSH20

Double hook

Wt. 0.6 lb.

No. BSH50

Single bar with 3 double hooks Wt. 1.5 lb.



731CS

CHAIN SAW HOLDER

- This tool holder hangs on the outside of the bucket and will hold cutters, compression tools and/or a chain saw.
- Made of ABS plastic.
- Durable in all temperature ranges.

No. 731CS

Tool holder

Wt. 5.0 lb.



745

REINFORCED BUCKET COVER

- Rugged coated polyester with or without foam insert.
- Designed for 24" x 24" bucket.
- Rope and snap hook to help secure to bucket.

No. 744

Soft bucket cover

Wt. 4.4 lb.

No. 745

Reinforced bucket cover

Wt. 6.7 lb.





LINE VEHICLE EQUIPMENT AND CONSTRUCTION TOOLS

Bashlin Industries, Inc. makes and sells quality tools and equipment for the professional lineworker. This includes slings, winchlines, payout reels, hot sticks, and more.

We specialize in the hard-to-find equipment unique to this market.

SLINGS/POLE SLINGS

NYLON SLINGS

- Rugged 950 Series orange nylon slings are made for the utility industry and to current ANSI standards.
- Standard length is 3 feet.
- Other lengths available upon request.



950-100



950-300

ENDLESS SLINGS

LOAD RATING LBS.				
	WIDTH	VERTICAL	CHOKER	BASKET
No. 950-100	1"	3200	2560	6400
No. 950-100D	1" DT	6200	4960	12400
No. 950-175	1 3/4"	4000	3200	8000
No. 950-175D	1 3/4" DT	8800	7040	17600
No. 950-200	2"	5600	4480	11200
No. 950-200D	2" DT	12200	9760	24400
No. 950-300	3"	8000	6400	16000
No. 950-300D	3" DT	15200	12160	30400



951-100



951-175



951-200

DOUBLE EYE STANDARD

LOAD RATING LBS.				
	WIDTH	VERTICAL	CHOKER	BASKET
No. 951-100	1"	3200	2560	6400
No. 951-175	1 3/4"	5400	4320	10800
No. 951-200	2"	6400	5120	12800
No. 951-300-4	3"	7800	6240	15600



WARNING: Always inspect slings before use. Heavily abraded, burned, or cut slings should be removed from service.



Contact customer service for abrasion resistance wear pads or custom slings.

DOUBLE EYE SINGLE PLY

LOAD RATING LBS.				
	WIDTH	VERTICAL	CHOKER	BASKET
No. 952-100	1"	1600	1280	3200
No. 952-175	1 3/4"	2800	2240	5600
No. 952-200	2"	3200	2560	6400
No. 952-300-4	3"	4200	3360	8400



953-200

RETURN EYE

LOAD RATING LBS.				
	WIDTH	VERTICAL	CHOKER	BASKET
No. 953-200	2"	5600	4480	11200
No. 953-350	3 1/2"	7600	6080	15200

POLE SLINGS

- Pole slings are available with (2011) or without (2012) hardware. The 2011 is designed for easy use with a shotgun stick.



2011-36

LOAD RATING LBS.					
	WIDTH	VERTICAL	CHOKER	BASKET	WT.
No. 2011-36	1 3/4"	1000	1000	2000	1.75 lb.
No. 2011-48	1 3/4"	1000	1000	2000	1.75 lb.
No. 2012-36	1 3/4"	3300	2640	6600	0.7 lb.
No. 2012-48	1 3/4"	3300	2640	6600	0.7 lb.



962NWTS

962NWTS: ADJUSTABLE NYLON TRANSFORMER SLING

- 1,000 lb. load rating.
- Features large rings to fit over the lifting hooks.

No. 962NWTS Adjustable nylon transformer sling

Wt. 1.6 lb.

ROPE SLINGS/AUGER SLINGS

ADJUSTABLE ROPE SLINGS

- These slings use 12 strand polyester single braid "P", 12 strand high-tenacity single braid urethane coated rope "Y", or Vectran single braid rope "V".



LOAD RATING LBS.				
		VERTICAL	CHOKER	BASKET
No. 960P	1/2" Polyester Blend Adj. 28" - 48"	1500	1200	2990
No. 960Y	5/8" Coated Polyester Adj. 32" - 60"	3344	2675	6598
No. 960YL	5/8" Coated Polyester Adj. 32" - 96"	3344	2675	6598

DOUBLE LEGGED ADJUSTABLE SLINGS

- The double leg adjustable rope sling features a center lifter point, with a protective cover and adjustment on both legs.
- Ideal for hanging transformers.



LOAD RATING LBS.				
		VERTICAL	CHOKER	BASKET
No. 962P	1/2" Polyester Blend Adj. 30" - 50"	1500	1200	2990
No. 962Y	5/8" Coated Polyester Adj. 30" - 50"	3344	2675	6598

FOUR LEGGED ADJUSTABLE SLINGS



- For pad mount transformers, we have the four legged sling. Each leg adjusts individually for quick rigging.

		LEG LENGTH	LOAD RATING
No. 965P	1/2" Polyester Blend	4' - 5'	6000 lb.
No. 965Y	5/8" Coated Polyester	5' - 7'	13376 lb.
No. 965YL	5/8" Coated Polyester	6' - 8'	13376 lb.
No. 965V	5/8" Vectran	5' - 7'	31920 lb.

*When legs are loaded evenly

FIXED LENGTH ROPE SLINGS

- Rope slings are made from 5/8"12 strand high-tenacity single braid urethane coated rope. The standard length is 3' for the endless, 4' for double eye.



LOAD RATING LBS.				
		VERTICAL	CHOKER	BASKET
No. 4950-58Y	5/8" endless sling	6460	5168	12920
No. 4951-58Y	5/8" double eye	3800	3040	7600



AUGER WIND UPS

- Strong, light-weight featuring reinforced eyes.
- Standard length is 10' (other lengths are available).

LOAD RATING LBS.				
		VERTICAL	CHOKER	BASKET
No. 770W	1" x 10' Nylon Web	1600	1280	3260
No. 770R	5/8" x 10' Coated Polyester	3800	3040	7600
No. 770RDE	1" x 10' Double Braid	8800	7040	17600



GRIP SLINGS

Our "GRIP" slings are ideal for handling and setting poles made from various materials, especially those with a smooth or painted surface. The added rubber material provides extra "GRIP" that can help reduce slippage and protect the finish of materials.



- Made with 1 3/4" web with a 1 3/4" wide section of diamond pattern rubber.
- 2011SE series has a sewn eye and steel ring
- 2012 series has 2 soft eyes.
- The 4" soft eyes have nylon wear sleeves and are easy to get on the hook.
- Available in both 52" and 72" lengths to suit your needs

2011 SE Series	SWL*
Vertical	2500 lbs.
Choked	2500 lbs.
Basket	5000 lbs.

2012 Series	SWL*
Vertical	3300 lbs.
Choked	2640 lbs.
Basket	6600 lbs.



- 951 Series "GRIP" slings both have two 4" sewn eyes with nylon wear sleeves and a 2" wide section of diamond pattern rubber for the "GRIP"
- Standard length for these slings is 72"

951-300-6G Series	SWL*
Vertical	7800 lbs.
Choked	6240 lbs.
Basket	15600 lbs.

951-200-6G Series	SWL*
Vertical	6400 lbs.
Choked	5120 lbs.
Basket	12800 lbs.

***SWL - Safe Working Load**

**CONTACT US IF YOU REQUIRE
MORE LIFTING CAPACITY OR A
CUSTOM LENGTH**



WARNING: Proper training when using these products is required

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!





ADJUSTABLE SLINGS

NO. 962Y-CL SERIES ADJUSTABLE SLINGS

- These two legged adjustable slings are great for handling pad mount transformers.
- Each leg can be easily adjusted. The center leg is designed to hold transformer lid.
- Made using 5/8" coated polyester rope with nylon wear sleeves on eyes.
- Leg length adjusts from 3' to 5'

SWL* 6410 lb.

When each leg is loaded equally

***SWL - Safe Working Load**

NO. 965Y-CL SERIES ADJUSTABLE SLING

- These four legged adjustable slings are great for handling pad mount transformers.
- Each individual leg can be easily adjusted.
- The center leg is designed to hold transformer lid.
- Made using 5/8" coated polyester rope with nylon wear sleeves on eyes.
- Leg length adjusts from 5' to 7'

SWL* 12820 lb.

When each leg is loaded equally



962Y-CL



965Y-CL

**CONTACT US FOR
MORE INFORMATION**

HANDLINES AND SLACK BLOCKS



940



945



945T

HANDLINES

- 1/2" polyester blend braided rope is the standard rope for all 940 series handlines. It is easily spliced and resists rotation under load.
- Standard 940 includes 500 lb. SWL* 35H drop forged alloy steel handline hook, SL6650A steel double locking snaphook, 75' of rope, and premium block.
- 940R comes with a 35H hook, 75' of rope, and steel snaphook.

No. 940	Complete handline assembly 500 lb.	Wt. 8.75 lb.
No. 940R	Rope only with 35H hook and snaphook - 500lb WLL*	Wt. 6.75 lb.

*SWL - Safe Working Load



SLACK BLOCK ASSEMBLY

- Slack blocks come with 30' of 3/8" double braid or polyester twist rope.
- "H" series features extended hooks.
- The maximum safe working load is 750 lb. SWL*

No. 945	Double Braid	Wt. 4.25 lb.
No. 945H	Double Braid with extended hooks	Wt. 4.25 lb.
No. 945T	Poly-Twist	Wt. 4.25 lb.
No. 945HT	Poly-Twist with extended hooks	Wt. 4.25 lb.



33



33L



35H



35GP



3550

PARTS FOR HANDLINES

No. 33	Handline carrier	Wt. 0.1 lb.
No. 33L	Locking handline carrier	Wt. 0.1 lb.
No. 35H	Handline hook - 500 lb. SWL*	Wt. 0.75 lb.
No. 35GP	Double hook - 100 lb. SWL*	Wt. 0.6 lb.
No. 3550	Handline block	Wt. 2.0 lb.

*SWL - Safe Working Load.



For handlines longer than 75' contact customer service

WINCH LINES/PULLING LINES



WINCH LINES

Bashlin will fabricate replacement winch lines for your material handling and digger trucks. Our splicers can manufacture to your specifications. Call us for pricing and delivery.

Ask about our winch line maintenance program.




DOUBLE BRAID WINCH LINES

- Double braid is low stretch, high strength rope with excellent dielectric properties.
- Urethane coating on the end provides abrasion resistance where you need it.
- Color coded coatings can make it easy to determine when it is time to replace your lines.
- 1/2" and 1" Double braid available.

No. 750DE12W08 1/2" Double braid winch line with 8' of urethane coating. Average breaking strength 11,000 - 2,200 lb. working load (5/1) 7.8 lb. per 100'

No. 750DE10W08 1" Double braid Winch line with 8' of urethane coating. Average breaking strength 46,200 - 9,240 lb. working load (5/1) 33.7 lb. per 100'

 Spools, shields, and shackles are available for your winch lines. Call for a quote.

HMPE WINCH LINES

- Double braided rope constructed of an inner load bearing HMPE core that is very strong with very little stretch. HMPE has the highest strength to weight ratio of any high modulus fiber.
- The core is urethane coated and over-braided with a polyester sleeve for a long wearing, extra strong line."

No. 750MP12W0 1/2" HMPE winch line with urethane coating. Average breaking strength 21,000 - 4,200 lb. working load (5/1) 7.2 lb. per 100'.

No. 750MP78W0 7/8" HMPE winch line with urethane coating. Average breaking strength 63,000 - 12,600 lb. working load (5/1) 21.3 lb. per 100'.

We can repair your worn and damaged lines when possible.



PULLING LINES INCLUDING PILOT LINES AND SPIDER LINES

- We recommend urethane coated 12 strand high-tenacity single braid rope for stringing applications.
- Call for part number, pricing and delivery.



PULLING GRIPS AND HOISTS



1685-20



1671-10

KLEIN PARALLEL JAW GRIPS

- The Klein parallel jaw grips have longer jaws for less slippage and conductor damage.

	MIN. CABLE	MAX. CABLE	SAFELOAD	WT.
No. 1686-10	.20	.40	10,000 lb.	5.0 lb.
No. 1686-20	.20	.40	10,000 lb.	5.0 lb.
No. 1671-10	.37	.75	10,000 lb.	5.0 lb.
No. 1672-10	.37	.75	10,000 lb.	5.0 lb.
No. 1685-20	.157	.844	4,500 lb.	3.0 lb.
No. 1685-31	.625	1.25	6,600 lb.	5.0 lb.



LMG4500



LMG4501

LITTLE MULE GRIPS

- These parallel jaw grips resist jamming and will release instantly. The design reduces cable damage.

STANDARD GRIPS:

	MIN. CABLE	MAX. CABLE	SAFELOAD	JAWS	WT.
No. LMG1000	.04	.394	1,000 lb.	Serrated	0.5 lb.
No. LMG2000	.109	.594	2,000 lb.	Serrated	1.0 lb.
No. LMG4500	.18	.60	5,000 lb.	Serrated	3.75 lb.
No. LMG4600	.30	.80	10,000 lb.	Serrated	6.50 lb.
No. LMG4800	.70	1.25	12,000 lb.	Serrated	9.0 lb.

HOT LINE GRIPS:

	MIN. CABLE	MAX. CABLE	SAFELOAD	JAWS	WT.
No. LMG4501	.18	.60	5,000 lb.	Serrated	4.0 lb.
No. LMG4601	.30	.80	10,000 lb.	Serrated	7.0 lb.
No. LMG4801	.70	1.25	12,000 lb.	Serrated	9.0 lb.



300A

LITTLE MULE STRAP HOIST

- The 300 Series hoists are designed for line work. They are light, easy to handle, and rugged. All of the working parts are exposed for easy field repair.

	SINGLE LINE CAPACITY	SINGLE LINE LIFT LENGTH	DOUBLE LINE CAPACITY	DOUBLE LINE LENGTH	WT.
No. 300A	1,500 lb.	9'	3,000 lb.	4.5'	10.5 lb.
No. 300DA	1,500 lb.	9'	3,000 lb.	4.5'	11.0 lb.



PA2000

CM TORNADO CHAIN HOIST

- Racheting chain hoist with swivel hooks.

	SINGLE LINE CAPACITY	SINGLE LINE LIFT LENGTH	WT.
No. PA2000	3,000 lb.	5	21.1 lb.



903LT

903LT: LIF-T

- Great for pad mount transformers.
- 5/8" grade 8 construction with handle.
- Orange corrosion resistant powder coating.
- Sold as a pair.
- 1,000 lb. capacity.


No. 903LT: LIF-T Lifting T

Wt. 0.5 lb.

CROSS ARM IRON, PAY-OUT REELS AND GROUND ROD DRIVERS



900

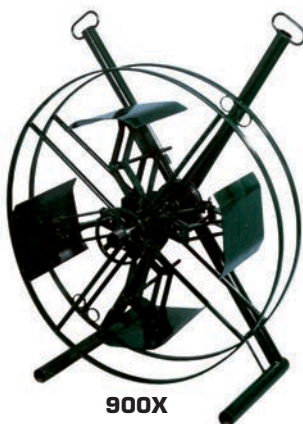

900X

PAY-OUT REELS

- Fully adjustable, all purpose device for use on trucks or as a portable pay-out reel.
- Works on many different coil sizes.
- Standard grease fitting provides full lubrication.
- Adjustable brake maintains line tension.
- 900-900X coil capacity.
- Diameter: 14" (minimum) - 32" (maximum)
- Width: 6" (minimum) - 11" (maximum)

	HEIGHT	WIDTH	DEPTH	WT.	SHIP WT.
No. 900	40"	37"	19"	145 lb.	175.0 lb.
No. 900S	35"	32"	19"	95 lb.	120.0 lb.
No. 900X	45"	37"	19"	165 lb.	180.0 lb.



901LF



901TI

CROSS ARM IRON

- Here is an easier way to rig for lifting a transformer (901LF), or sagging a line (901TI). These versatile anchors can be placed in position with a hot stick even if pre-rigged. The load rating is 1500 lb.

No. 901LF	Cross arm iron	Wt. 3.5 lb.
No. 901TI	Cross arm iron II	Wt. 3.5 lb.



902

WIRE BASKET

- Lightweight, compact wire dispenser that will accommodate reels up to 26" x 4 1/4".
- Features a hanger for easy mounting on a truck and an eyelet for temporary pole attachment.

No. 902	Wire basket	Wt. 11.0 lb.
No. 902-30	30" wire basket	Wt. 12.0 lb.



930



930UT

GROUND ROD DRIVER

- Designed to ease the chore of driving ground rods.
- Compact, safe, easy to handle and store.
- Enables a workman to drive an 8' rod while standing on the ground.
- The 930UT features hand guards.
- 1/2", 5/8" and 3/4" ground rods.

No. 930	Ground rod driver	Wt. 20.0 lb.
No. 930UT	Ground rod driver with hand guard	Wt. 24.0 lb.

CUTTERS AND URD DISCONNECT TOOL

Porter ratchet cutters use the combination ratchet and chain for smooth, progressive cuts. The handles are insulated and factory tested. Parts are available for field repairs.



8690FH

8690FH

- A 29 1/4" cutter for shearing cuts on ACSR and common steel.

No. 8690FH 13/16" jaw opening Wt. 12.25 lb.



8690CK

8690CK

- A rugged 28", extra-duty cutter for EHS guy strand. The jaws hold the wire for square, clean cuts.

No. 8690CK 7/16" jaw opening Wt. 11.0 lb.



BC18F



BC24F

CUTTERS WITH FIBERGLASS HANDLES

- Handles are tested to 100kv per foot.

No. BC18F 18" length, 3/8" capacity Wt. 4.5 lb.

No. BC24F 24" length, 7/16" capacity Wt. 4.5 lb.



RJL1967RCP

URD DISCONNECT TOOL

- Original LeVesque URD disconnect featuring three jaw operation and a pusher rod for smooth disconnects. It is done with a minimum of strain and chafing on the semi-conductor. It tests at 100 kV per foot.
- The standard length is 5'. Other lengths are available on request.


No. RJL1967RCP Tool Wt. 10.5 lb.

No. 1967B Carrying case Wt. 1.25 lb.

SWITCH STICKS AND SHOTGUN STICKS

HASTINGS HOT STICKS

- Recognizable by their bright yellow color, they are the finest insulated tools available to the professional lineman.

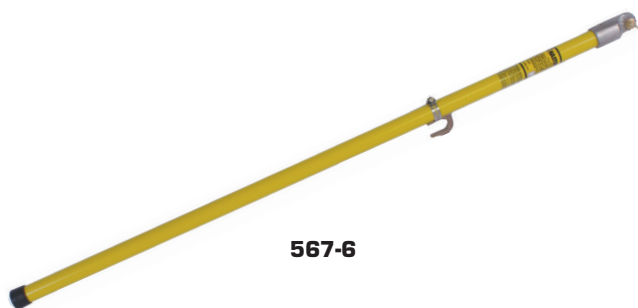


567-6

FIXED LENGTH UNIVERSAL HEAD SWITCH STICKS

- These fixed length sticks have a universal head for use with most hot stick accessories.
- Stick Hanger is included.

No. 567-6	6' length	Wt. 1.4 lb.
No. 567-8	8' length	Wt. 2.6 lb.
No. 567-10	10' length	Wt. 3.3 lb.
No. 567-12	12' length	Wt. 4.0 lb.

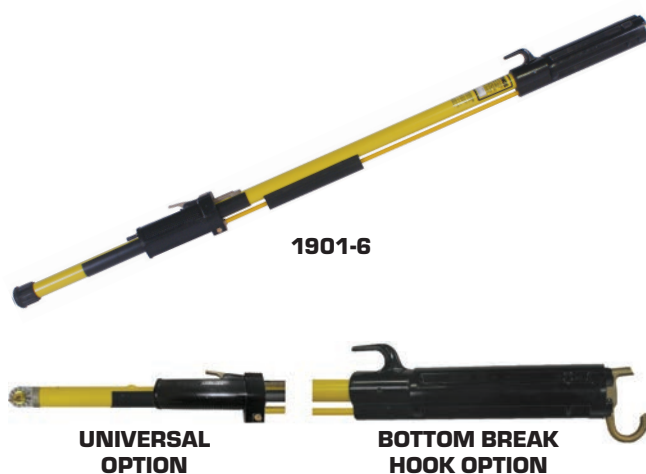

1901-6

UNIVERSAL
OPTIONBOTTOM BREAK
HOOK OPTION


SHOTGUN STICKS

- Shotgun sticks with eternal operating rods, hanger hook, and end caps.

No. 1901-6	6' - 6" length	Wt. 4.5 lb.
No. 1901-10	10' - 6" length	Wt. 7.2 lb.

TELESCOPING SWITCH STICKS

- Hastings Tel-O-Pole sticks feature the easy to hold sure lock triangle shape
- Fluorescent green tip section with foam core

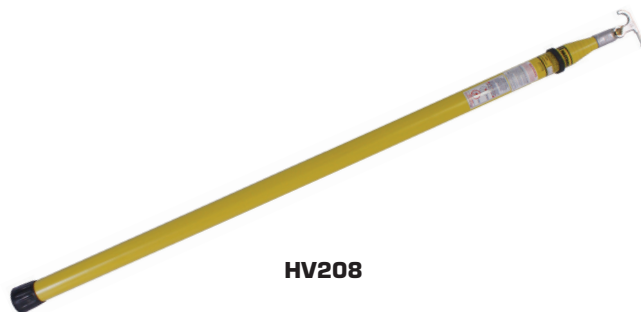


HV208

STANDARD DUTY TEL-O-POLE II

- The "No Twist" stick.

	EXTENDED LENGTH	RETRACTED LENGTH	WT.
No. HV208	8'	26"	3.0 lb.
No. HV212	12' - 7"	58"	3.7 lb.
No. HV225	25' - 6"	64"	8.1 lb.
No. HV230	30'	66"	10.0 lb.
No. HV235	35'	68"	12.1 lb.

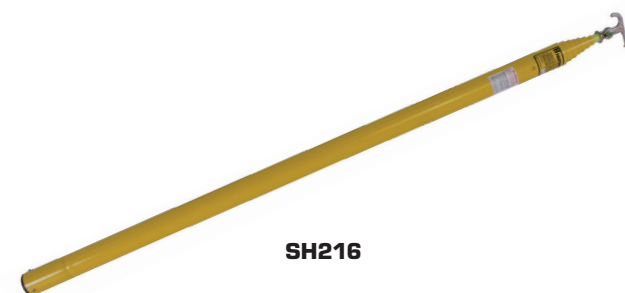

SH216

HEAVY DUTY TEL-O-POLE

	EXTENDED LENGTH	RETRACTED LENGTH	WT.
No. SH216	9' - 13' - 17'	58 1/8"	4.8 lb.
No. SH200	13' - 17.5' - 21.5'	60"	6.57 lb.
No. SH230	13'-17.5'-21.5'-26'-30'	63 3/8"	10.3 lb.



Hot Stick accessories available upon request. Sticks over 5' will be shipped via motor freight. Other length sticks available upon request.

ELECTRICIAN'S/INSTALLERS HOLSTERS, AND BELTS

HOLSTERS

Bashlin holsters put your tools where you want them, within easy reach. They are designed with the worker in mind and made with only the highest quality leathers and the finest craftsmanship.

These holsters are not for use on linemen's tool belts.



111YS



111YSX

111YS

- Sturdy holster with a harness leather back.

No. 111YS	9 1/4" x 10 1/2"	Wt. 1.25 lb.
No. 111YSX	9 1/4" x 10 1/2" - black	Wt. 1.25 lb.



111JBS



111JBSX

111JBS

- Built from select leathers and is made to last.

No. 111JBS	8 1/2" x 9" x 4"	Wt. 1.25 lb.
No. 111JBSX	8 1/2" x 9" x 4" - black	Wt. 1.25 lb.



111JLMS



111JLMSX

111JLMS

- If you are carrying a lot of tools, this may be the holster you need. It is our largest multipurpose holster.

No. 111JLMS	12" x 9" x 4 3/4"	Wt. 2.0 lb.
No. 111JLMSX	12" x 9" x 4 3/4" - black	Wt. 2.0 lb.



112HLS



112HLSX

112HLS

- Harness leather backed groundman's holster for pliers, rule, screwdriver, and Channellock®.

No. 112HLS	7 1/2" x 12"	Wt. 1.0 lb.
No. 112HLSX	7 1/2" x 12" - black	Wt. 1.0 lb.



112CIL



112CILX

112CIL

- Large cable installer with extra pockets.

No. 112CIL	8" x 12"	Wt. 1.0 lb.
No. 112CILX	8" x 12" - black	Wt. 1.0 lb.



625

630

628

ELECTRICIAN'S BELTS

- Add "X" to part number for black.
- Specify a size.

No. 625	1 3/4" russet leather utility belt	Wt. 1.0 lb.
No. 628	1 3/4" electrician's belt will carry a hammer, tape, and a knife with the holster	Wt. 1.0 lb.
No. 630	Heavy duty 2" belt with a double tongue buckle.	Wt. 1.25 lb.

LINEMEN'S RUBBER GLOVES

High quality, natural rubber type I gloves have textured inside surface, "curved hand" comfort and flexibility.

WHEN PURCHASING LINEMEN'S GLOVES, PLEASE CONSIDER:



**ONE FINGER
MITTEN**



STANDARD



LOW VOLTAGE

STYLE:

- Available in standard, bell cuff, one finger mittens and special order glove.



GLOVE LENGTH:

- CLASS 00, 0:** 10 1/2", 14"
- CLASS 1, 2:** 14", 16", 18"
- CLASS 3:** 16", 18"
- CLASS 4:** 18"

VOLTAGE RATING:

CLASS	LABEL	COLOR	MAXIMUM USAGE	AC TEST VOLTAGE
00		Beige	500v	2,500v
0		Red	1,000v	5,000v
1		White	7,500v	10,000v
2		Yellow	17,500v	20,000v
3		Green	26,500v	30,000v
4		Orange	36,000v	40,000v



DID YOU KNOW?

OUR GLOVES ARE 100% TESTED FOR VISUAL FLAWS AND IMPERFECTIONS, AND ARE ELECTRICALLY TESTED PER ASTM STANDARDS. IF REQUESTED, IN SERVICE DATING CAN BE MARKED ON THE GLOVES. CERTIFIED THIRD PARTY TESTING BY A NAIL CERTIFIED LAB IS AVAILABLE ON REQUEST.



COLORS:

- Manufactured in solid colors or two contrasting colors for easier inspection. The lighter color is inside and the black is on the outside. Two color gloves are normally Class 1 and higher.



SIZE:

- Sized according to the circumference of the hand below the base of the fingers, on a line parallel to the base of the finger crotches, passing through the thumb crotch. Add 1" to the measurement for the proper size.

ORDER NUMBER/SPECIFICATIONS:

	MAX. USAGE	CLASS	AC TEST VOLTAGE	COLOR	SIZE
No. 1100Y	500v	00	2,500	Yellow	10 1/2"
No. 110Y	1,000v	0	5,000	Yellow	10 1/2"
No. 140Y	1,000v	0	5,000	Yellow	14"
No. 14-10B	7,500v	1	10,000	Black	14"
No. 14-20B	17,000v	2	20,000	Black	14"
No. 16-20B	17,000v	2	20,000	Black	16"
No. 18-20B	17,000v	2	20,000	Black	18"
No. 14-20YB	17,000v	2	20,000	Yellow/Black	14"
No. 16-20YB	17,000v	2	20,000	Yellow/Black	16"
No. 18-20YB	17,000v	2	20,000	Yellow/Black	18"
No. 16-30YB	26,500v	3	30,000	Yellow/Black	16"
No. 18-30YB	26,500v	3	30,000	Yellow/Black	18"
No. 18-40B	36,000v	4	40,000	Black	18"
No. 18-40YB	36,000v	4	40,000	Black	18"

LEATHER PROTECTOR GLOVES AND LINERS



1050

1057



1200

910/999

KUNZ LEATHER PROTECTOR GLOVES

- Bashlin offers the Kunz protectors for primary (high voltage) and secondary (low voltage) linemen's gloves.
- Bashlin offers the following protectors:
 - 1050 Series:** cream cowhide (primary)
 - 1057 Series:** bucktan cowhide (primary)
 - 1200 Series:** goatskin (primary)
 - 999 Series:** goatskin (secondary)
 - 910 Series:** goatskin (class 00)
- Made from 2.75 to 3.5 oz soft and pliable leather. The cowhide is popular and long wearing. The goatskin offers the best dexterity.
- Protectors for one finger mittens and bell cuff gloves are also available. Contact customer service for ordering information.
- Order by rubber glove size. Bashlin offers whole sizes only. Round half sizes up to the next whole size for proper fit. For 40KV gloves, add 1 full size for proper fit.

FOR EXAMPLE:

Linemen's glove size 9 1/2 = protector size 10

Linemen's glove size 10 = protector size 10

ORDER NUMBER/SPECIFICATIONS:

	USAGE/ VOLTAGE	O.A.L. LENGTH/STYLE	MATERIAL	WT.
No. 910	Low	8" with strap	Goatskin	0.4 lb.
No. 999S	Low	9" with strap	Goatskin	0.4 lb.
No. 999	Low	9"	Goatskin	0.4 lb.
No. 1050-3	High	12"	Cream Cowhide	0.6 lb.
No. 1200-3	High	12"	Goatskin	0.6 lb.
No. 1057-3	High	12"	Buck Tan Cowhide	0.6 lb.
No. 1050-3BC	High	12" Bell Cuff	Cream Cowhide	0.6 lb.
No. 1200-3BC	High	12" Bell Cuff	Goatskin	0.6 lb.
No. 1057-3BC	High	12" Bell Cuff	Buck Tan Cowhide	0.6 lb.
No. 1050-5	High	14"	Cream Cowhide	0.7 lb.
No. 1200-5	High	14"	Goatskin	0.7 lb.
No. 1057-5	High	14"	Buck Tan Cowhide	0.7 lb.
No. 1050-3-1F	High	12" Mitten	Cream Cowhide	0.6 lb.
No. 1050-3-1FBC	High	12" Mitten/Bell Cuff	Cream Cowhide	0.7 lb.



580M

581K

RUBBER GLOVE LINERS

- Glove liners warm the hand in winter and absorb summer perspiration. One size fits all.

No. 580M	Mitten liner	Wt. 0.1 lb.
No. 581K	Liner with knit cuff	Wt. 0.1 lb.



WARNING: Users are responsible for specifying the correct protector length. For minimum distance requirements between the glove gauntlet and protector cuff, see ASTM F496 Table 4. Failure to maintain the proper distance between the gauntlet and cuff may cause accidental injury or death.

RUBBER SLEEVES, CLIMBER GUARDS, AND CLEANERS



RUBBER SLEEVE

SALISBURY LINEMEN'S RUBBER SLEEVES

- Flexible curved arm sleeves.
- Bashlin offers black and yellow/black sleeves.

	CLASS	TEST VOLTAGE	COLOR	LENGTH
No. SLR-10Y	1	10,000v	Yellow	26 1/2"
No. SLL-10Y	1	10,000v	Yellow	28"
No. SLXL-10Y	1	10,000v	Yellow	29 1/2"
No. SLR-20B	2	20,000v	Black	26 1/2"
No. SLL-20B	2	20,000v	Black	28"
No. SLXL-20B	2	20,000v	Black	29 1/2"
No. SLR-20YB	2	20,000v	Yellow/Black	26 1/2"
No. SLL-20YB	2	20,000v	Yellow/Black	28"
No. SLXL-20YB	2	20,000v	Yellow/Black	29 1/2"
No. SLR-30Y	3	30,000v	Yellow	26 1/2"
No. SLL-30Y	3	30,000v	Yellow	28"
No. SLXL-30Y	3	30,000v	Yellow	29 1/2"

Sleeve Sizing: Measure the distance from the top of the shoulders (between the base of the neck and the shoulder bone) to the wrist bone.



Yellow and red sleeves are available upon request. Contact us for complete information.



SH1



SS2



SF4

SLEEVE ACCESSORIES

No. SH1	Harness (1 required)	Wt. .25 lb.
No. SS2	Straps (1 pair required)	Wt. .20 lb.
No. SF4	Screw type fasteners (4 in package)	Wt. .10 lb.



805S

GLOVE DUST

- Bashlin's glove dust lubricates while it absorbs moisture and perspiration. It will not damage natural rubber gloves.

No. 805-4	Glove Dust (4 - 1 quart)	Wt. 5.5 lb.
No. 805S	Dust filled shaker only (6 oz.)	Wt. 1.0 lb.

GROUNDING EQUIPMENT AND POLE BAND



POLE BAND

- This is a quick and easy way of marking and tagging lines during storms and routine switching. The band is easy to spot and holds a card in a weather resistant pouch with all of the necessary information.
- Secures to pole using Hook-N-Loop.

No. 719 "WORKER ON LINE"

Wt. 2.0 lb.

No. 719-CAUTION "CAUTION"

Wt. 2.0 lb.



GROUNDING EQUIPMENT

Contact Bashlin for your grounding needs. We offer 2/0 cable and a variety of standard clamps. In addition we can help you select the correct equipment for your particular requirements.

Please provide the following information and we will quote a price:

- Location/apparatus to ground
- Clamp design and size
- Cable length
- System fault current




930T

TRUCK GROUND

- This device will provide a quick, temporary ground when one is needed.
- A 5' rod is threaded into a ground rod driver.
- The driver can then be used to drive and remove the temporary ground.
- This device works in most rocky or frozen soil.
- The cable and clamps are not included.

No. 930T	5/8" threaded driver only	Wt. 19.0 lb.
No. 930TG	Threaded driver with a 5' rod	Wt. 23.0 lb.
No. GR558	5/8" threaded ground rod.	Wt. 4.0 lb.

LINEMEN'S BLANKETS, PVC SHEETING

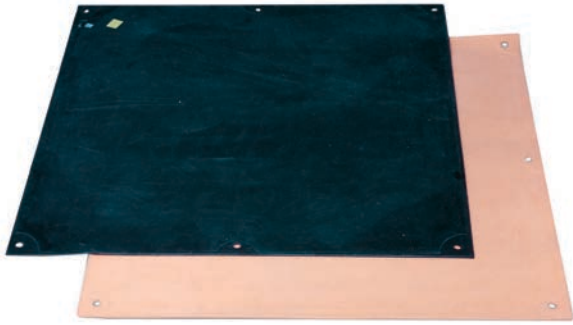

LB127/LBS136

LINEMEN'S BLANKETS

- These linemen's blankets are available in Type I natural rubber and Type II ozone resistant synthetic material.
- They meet or exceed all current ASTM specifications.

	TYPE	SIZE	COLOR	RATING	WT.
No. LB127	I	27" x 36"	Black	20,000v	6.25 lb.
No. LB136	I	36" x 36"	Black	20,000v	8.5 lb.
No. LBS127	II	27" x 36"	Orange	40,000v	6.25 lb.
No. LBS136	II	36" x 36"	Orange	40,000v	8.5 lb.



LBS136SL

SLOTTED LINEMEN'S BLANKET

- These Type II blankets are available with 2" or 4 1/2" center holes.

	CTR. HOLE	SIZE	COLOR	RATING	WT.
No. LBS136SL	2"	36" x 36"	Orange	40,000v	8.0 lb.
No. LBS136SL-4	4 1/2"	36" x 36"	Orange	40,000v	8.0 lb.



LBSV118

ZIP-ON BLANKETS

- These Type II blankets use Hook-N-Loop fasteners for easy application. They are ideal for cross arm braces and primary elbows.

	SIZE	COLOR	RATING	WT.
No. LBSV118	18" x 36"	Orange	40,000v	1.75 lb.
No. LBSV127	27" x 36"	Orange	40,000v	8.5 lb.



PVC136-50

PVC INSULATING SHEETING

- Designed for one use only. This is an excellent alternative to standard linemen's blankets for low voltage applications.
- Tested to 10kV and meets all of the appropriate ASTM standards.

No. PVC136-50	Sheeting - 48" x 50" roll	Wt. 61.0 lb.
No. PVC136FB	Fiber storage box	Wt. 19.0 lb.
No. PVC136-30	36" x 30' roll	Wt. 50.0 lb.

ELECTRICAL PERSONAL PROTECTION EQUIPMENT



- **Clamps reduce mechanical wear on blankets.**

- The Finger is a safe and convenient way to lubricate your hoses. Simply clip can of silicone spray into the metal clips. When you pull your hose over "The Finger," the hose is spread, and the spray is directed into the inner skirt of the hose.
- The Finger can be mounted in your vise, fixed to the tailboard of your truck or permanently mounted inside the bin door.

NOTES:

INSULATING LINE HOSE, CONNECTORS, COVERS

LINE HOSE

- Bashlin offers Type II ozone resistant line hose in straight or connector end design. This conventional line hose is available in 4 1/2' and 6' lengths.



555-24-45



550-25-45

STRAIGHT LINE HOSE:

	SIZE	CLASS	WT.
No. 550-25-45	1 1/4" x 4 1/2'	2	5.75 lb.
No. 550-25-6	1 1/4" x 6'	2	6.0 lb.
No. 550-50-45	1 1/2" x 4 1/2'	3	7.0 lb.
No. 550-50-6	1 1/2" x 6'	3	7.0 lb.

CONNECTOR END LINE HOSE:

	SIZE	CLASS	WT.
No. 555-25-45	1 1/4" x 4 1/2'	2	7.0 lb.
No. 555-25-6	1 1/4" x 6'	2	7.25 lb.
No. 555-50-45	1 1/2" x 4 1/2'	3	8.0 lb.
No. 555-50-6	1 1/2" x 6'	3	10.75 lb.



550-25

550-50C

LINE HOSE CONNECTORS:

	SIZE	CLASS	WT.
No. 550-25C	1 1/4" x 12"	2	3.25 lb.
No. 550-50C	1 1/2" x 12"	3	3.0 lb.



560-2

INSULATOR COVERS

- Salisbury Type II Insulator Covers for conventional line hose are available in 1", 1 1/4", and 1 1/2" diameters.

	INSULATOR TYPE	LINE HOSE DIAMETER	CLASS	WT.
No. 560-2	55-4	1"	2	7.0 lb.
No. 560-3	55-5	1 1/4" - 1 1/2"	3	8.0 lb.



2464



2464

POLE GUARDS


- Made of high impact grade ABS plastic, the natural spring action holds this temporary insulation in place.
- Maximum use voltage should not exceed 26kV to ground, 44kV phase to phase, and limited to "brush" contact.

No. 2464	12" diagonal x 4' long	Wt. 15.0 lb.
No. 2466	12" diagonal x 6' long	Wt. 22.0 lb.
No. 216	Pole guard bag 12" x 78"	Wt. 4.0 lb.

TRAVELING GROUNDS

The Bashlin 1590C and 336A traveling grounds reduce the possibility of electric shock due to accidental contact with energized conductors during stringing operations.

They are heavy duty units designed for conductors measuring up to and including 336MCM and 1590MCM respectively.

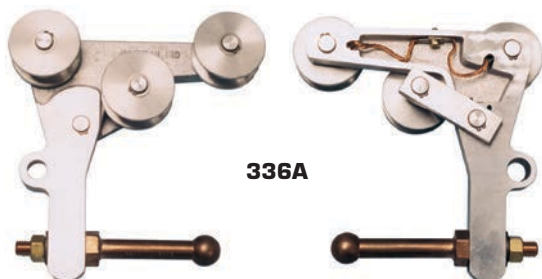


336A

No. 336A

Traveling ground


Wt. 3.0 lb.

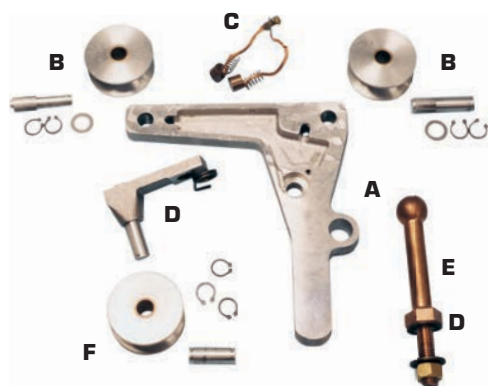

336A REPLACEMENT PARTS

- This unit is designed for field repairs.
- The replacement parts are packaged to allow complete, easy replacement.

No. 336A-1	(A) Frame	Wt. 0.6 lb.
No. 336A-2	(B) Frame sheaves (2) with axle bolts, washers, and snap rings	Wt. 0.6 lb.
No. 336A-3	(C) Brush set (2 pc.) with springs and screws	Wt. 0.1 lb.
No. 336A-4	(D) Tension arm assembly, including spring, axle, snap ring, and washer (sheave is not included)	Wt. 0.7 lb.
No. 336A-5	(E) Ground stud (only)	Wt. .75 lb.
No. 336A-6	(F) Tension arm sheave with axle bolt, washer, and snap rings	Wt. 0.4 lb.
No. 336A-8	Carrying case (not pictured)	Wt. 0.4 lb.

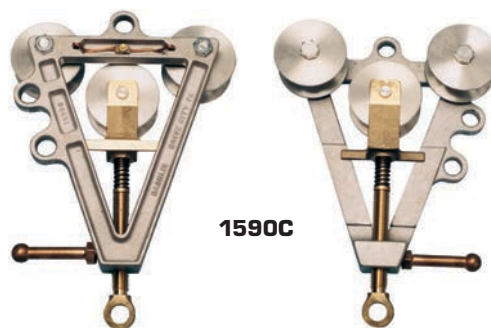


1590C

No. 1590C

Traveling ground

Wt. 12.0 lb.

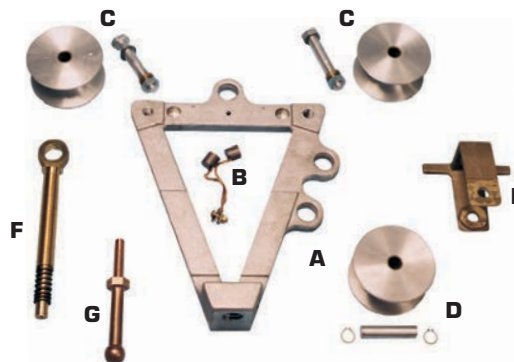

1590C REPLACEMENT PARTS

- This unit is designed for field repairs.
- The replacement parts are packaged to allow complete, easy replacement.

No. 1590C-1	(A) Frame with heli-coil	Wt. 3.75 lb.
No. 1590C-2	(B) Brush set (2 pc.) with springs and screws	Wt. 0.2 lb.
No. 1590C-3	(C) Frame sheaves (2 pc.) with axle, washers, and snap rings	Wt. 1.5 lb.
No. 1590C-4	(D) Yoke sheave (1 pc.) with axle, washers, and snap rings	Wt. 0.7 lb.
No. 1590C-5	(E) Yoke (only)	Wt. 1.5 lb.
No. 1590C-6	(F) Eyebolt assembly with spring, snap ring, and thrust washer	Wt. 1.5 lb.
No. 1590C-7	(G) Ground stud (1)	Wt. .75 lb.
No. 1590C-8	Carrying case (not pictured)	Wt. 0.5 lb.



WARNING: Test results have demonstrated the **336A** meets the short circuit requirements to be rated **Grade 3** per ASTM F885 requirements.

Test results have demonstrated the **1590C** meets the short circuit requirements to be rated **Grade 5** per ASTM F885 requirements.

Do not use these units unless the rating falls within the energy for the system on which the ground is used.

NOTES:



WORK GLOVES, PPE AND TRAINING

In an effort to provide for the complete needs of linemen, **Bashlin Industries, Inc.** offers products for comfort and protection from the elements. This includes top quality work gloves, and hard hats.

KUNZ WORK GLOVES

The Kunz glove features durable wear qualities and outstanding comfort. They are the choice, along with Bashlin products, for the professional lineworker.



556

956

DRIVER'S GLOVE

- Developed as a quality alternative to the imported canvas-leather gloves used in light work and by machine operators.
- A major utility found that even with a higher initial cost, the wear qualities of the 956 made it an economical alternative to less expensive products.
- Specify size.

No. 556	Cowhide driver's glove 4" cuff	Wt. 0.5 lb.
No. 956	Cowhide driver's work glove	Wt. 0.5 lb.
No. 956E	Buckskin driver's work glove	Wt. 0.5 lb.



815

KNEE PADS

- This is the original "Knee-Pro" protector. It features 1/2" foam pads, a thick plastic shell, and non-skid grips for extra comfort.

No. 815	Knee pads	Wt. 1.0 lb.
----------------	-----------	-------------



148

150

120

HEAVY DUTY WORK GLOVES

- The Kunz work glove features reinforced thumb straps and outside seams with tip protectors.
- Specify size.

No. 148	Medium buckskin	Wt. 1.0 lb.
No. 150	Heavy buckskin	Wt. 1.0 lb.
No. 120	Heavy top grain cowhide	Wt. 1.0 lb.



PLEASE PROVIDE GLOVE SIZE.

SMALL: 8 - 8 1/2	MEDIUM: 9 - 9 1/2
LARGE: 10 - 10 1/2	X-LARGE: 11 - 11 1/2

Determine your glove size by measuring the circumference of the hand below the base of the fingers as shown and add 1" to the measurement.

**KUNZ GLOVE
COMPANY INC.**
MADE IN THE USA • SINCE 1900



76PAT-RT PATRIOT RESCUE TRAINER



The Bashlin 76PAT-RT Patriot™ Rescue Trainer is designed for use in hurt man pole top rescue training. It is designed to position a manikin on a pole to simulate an unresponsive line worker that was using a Bashlin 76PAT Patriot™ WPFRD. Additionally, it is designed with an extra specified length of high visibility blaze orange inner rope that, after cutting in a rescue training exercise, can be quickly and easily replaced so that a subsequent training session can be conducted.

No. 76PAT-RT-100

Rescue trainer with 100' rope and bag.

Wt. 15.00 lb.



WARNING

Not for human support. This is not a WPFRD. Use during training to support an approved manikin only.


**CONTACT US FOR
MORE INFORMATION**

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



RODEO, TRAINING PRODUCTS

Bashlin offers the official training products used at the National Linemen's Rodeo. We have been a proud sponsor and supporter of this event since 1987.

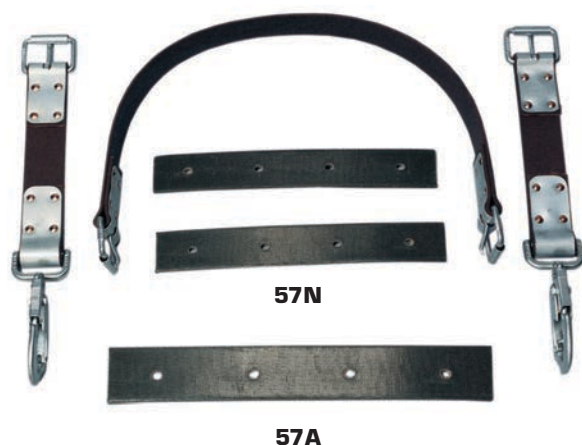

POLE TOP RESCUE STRAP

- This unit helps the lineworker truly simulate cutting a victim down from a pole without destroying perfectly good equipment.
- It holds a rescue dummy in place so the rescue can be performed. Note: One set of 57A inserts are included with this unit. Additional inserts must be purchased separately.

No. 57N	Rescue strap assembly. Two short snap/buckle sections, one double buckle section to go around the pole, and two inserts	Wt. 6.0 lb.
No. 57A	Replacement insert. One insert is 12" long with 4 holes, so it can be cut up to 3 times	Wt. 0.5 lb.



LINEMAN'S RODEO TOOLS

No. 650RDB	Ditty bag	Wt. 0.2 lb.
No. 650MB	6" Canvas Mini Bucket	Wt. 0.2 lb.
No. 650MB-C	6" Canvas Mini Bucket (Camo)	Wt. 0.2 lb.
No. 650MB-P	6" Canvas Mini Bucket (Pink)	Wt. 0.2 lb.
No. 650MB-B	6" Canvas Mini Bucket (White)	Wt. 0.2 lb.
No. 650MB-O	6" Canvas Mini Bucket (Orange)	Wt. 0.2 lb.
No. 650MB-BX	6" Canvas Mini Bucket (Black)	Wt. 0.2 lb.



RESCUE RANDY

- Official rescue mannequin of the Linemen's Rodeo.
- Lifelike, durable, articulated joints and weight distribution.
- Great for pole top and bucket rescue.

No. RR165	165 lb. manikin	Wt. 175.0 lb.
No. 632RR	Waist belt for manikin	Wt. 2.0 lb.



Replacement parts for Rescue Randy are available. Contact customer service for information.



WARNING: The 57N is only for holding a manikin or weight in position. It is not for personnel support.

HARD HATS/LINERS



ME3-Y

ME3-B

ME3-O

ME3 HARD HAT

- Features a standard style brim and a ratchet adjustment.
- Available in white, yellow, orange or blue.

No. ME3-W	White hard hat	Wt. 1.0 lb.
No. ME3-Y	Yellow hard hat	Wt. 1.0 lb.
No. ME3-O	Orange hard hat	Wt. 1.0 lb.
No. ME3-B	Blue hard hat	Wt. 1.0 lb.



BE4-O

BE4-B

BE4: FULL BRIM HARD HAT

- Especially popular in warmer climates.
- Features a full style brim and a ratchet adjustment.
- Available in white, yellow, orange or blue.

No. BE4-W	White hard hat	Wt. 1.0 lb.
No. BE4-Y	Yellow hard hat	Wt. 1.0 lb.
No. BE4-O	Orange hard hat	Wt. 1.0 lb.
No. BE4-B	Blue hard hat	Wt. 1.0 lb.



EL27B

HAT LINERS

- Made of flame retardant, preshrunk cotton twill.
- Thermal lined and have elastic web chin straps.
- One size fits all.
- Made in the USA.

No. EL27B-0	Medium length extending below the collar	Wt. .25 lb.
No. EL29B-0	Extra length extending below the collar	Wt. 0.4 lb.
No. EL23BFM-0	Medium length with a face mask, held in place with velcro fasteners	Wt. 0.4 lb.

HARD HAT ACCESSORIES

No. ME91R	Suspension (ratchet adjustment)	Wt. .25 lb.
No. M94	Chin strap	Wt. 0.4 lb.

SAFETY BOOKLETS

Important Safety Information for Users of Bashlin Personal Fall Protection Equipment Harnesses, Lanyards Anchorage Connectors



- WARNING -
For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. PFPE-405-B Rev. 8-22



Important Safety Information for Users of Lineman Tool Belts Lineman Climbing Harnesses Pole Straps Adjustable Positioning Lanyards Auxiliary Positioning Belts



- WARNING -
For your personal safety, this booklet must be completely read and all of the information understood completely before using these products.

For information regarding Wood Pole Fall Restricting products, see the information included with the product. See our catalog or www.bashlin.com for leather care and cleaning products.



No. BLBH 514 Rev. 7-22



Important Safety Information for Users of Bashlin Climbers and Accessories



- WARNING -
For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. BLCL 514, Rev. 4-21



Important Safety Information for Users of Bashlin Aerial Self-Rescue Devices Suspension Trauma Relief Products Bucket Rescue Kits



- WARNING -
For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. BREO Rev. 1-21



Important Safety Information for Users of BASHLINPATRIOT™



- WARNING -
For your personal safety, this booklet must be completely read and all of the information understood completely before using these products.

For information regarding Wood Pole Fall Restricting products, see the information included with the product. See our catalog or www.bashlin.com for leather care and cleaning products.



No. BPM Rev. 10-19



Important Safety Information for Users of Bashlin Arborist Saddles



- WARNING -
For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. ARB Rev. 03-21



BASHLIN INDUSTRIES, INC. | PRODUCT INDEX

A

Adjustable Rope Lanyards	31, 32
Aerial Bags	73, 74
Anchor Straps	59
Anchorage, Care and Maintenance	61
Anchorage	59
Arborist Saddles	14, 15
Auger Wind Ups	81

B

Back Packs	68
Bags, Rodeo Ditty	104
Bags, Back Packs	68
Bags, Blanket	71
Bags, Gear	69
Bags, Glove and Sleeve	70
Bags, Ground Set	72
Bags, Hot Stick	72
Bags, Nut and Bolt	9, 17, 18
Bags, Roller	69
Bags, Line Hose	71
Belts, 2 D-Ring	12
Belts, 4 D-Ring	8, 9, 10, 11
Belts, Auxiliary Positioning	16
Belts, Care and Maintenance	37, 106
Belts, Electrician	90
Belt, Sizing	6
Belts, Styles	7
Belts, Supporter	16
Belts, Suspenders	16
Belts, Groundman	90
Blanket Bags	71
Blanket Canister	71
Blanket Clamps	97
Blanket Rolls	71
Blankets, Rubber	96
Blocks	84
Bucket Cover	77
Bucket Hooks	76, 77
Bucket Knuckle	76
Bucket Rescue Equipment	63, 64, 65

Buckets	73, 74
Bug wrenches	34

C

Carabiners	60
Chain Hoist	86
Chain Saw Holder	77
Channel Locks	35
Climber Accessories	28, 29
Climber Pad, Hook-N-Loop	13, 26
Climber Pads	26, 27
Climber Parts	28, 29
Climbers, Aluminum	23, 25
Climbers, Steel	23, 24, 25
Climbers	23, 24, 25
Climbing Harnesses	48, 49
Confined Space Harnesses	50
Connectors	59
Cross Arm Iron	87
Cutters	88

D

Descenders	60
Dielectric Harnesses	47

F

Fall Protection Information	40, 41
Fall Restriction Device	30
Folding Rules	36

G

Gaff Gauge	29
Gaff Guards	29
Gaff Shaping Kit	29
Gaffs, Replacement	29
Glove Bags	70
Glove Dust	94
Gloves, Kunz Work Gloves	102
Gloves, Leather Protectors	93
Gloves, Liners	93
Gloves, Sizing	92

Gloves, Driver	102
Ground Rod Driver	87
Grounding Equipment	95, 99

H

Hammers	36
Hand Tools	34, 35, 36
Handline Block	84
Handline Carrier	22, 84
Handline Hooks	84
Handline Parts	84
Handlines	84
Hard Hat Accessories	105
Hard Hat Liner	105
Hard Hats	105
Harness, Bag	49
Harness, Back Attachments	42
Harness, Care and Maintenance	41
Harness, Options	43
Harness, Sizing	43
Harness, Styles	44-50
Heel Cover	29
Hoists	86
Holsters, Bell Wrench	21
Holsters, Electrician	89
Holsters, Groundman	22
Holsters, Lineman	19, 20, 21
Holsters, Lowell Wrench	21
Holsters, Skinning Knife	21
Holsters, Accessories	21
Hot Stick Bags	72
Hot Sticks	89

I

Insulator Covers	98
------------------------	----



BASHLIN INDUSTRIES, INC. | PRODUCT INDEX

K

Klein Bell Wrench.....	34
Klein Adjustable Wrenches	34
Klein Lineman Pliers	35
Knee Pads.....	102
Knives	35

L

Ladder Snaphooks.....	60
Lanyard, Care and Maintenance	58
Lanyard, Shock Absorbing	51-56
Lanyard, Positioning	57
Lanyard, Self Retracting	54
Lanyard, Twin Leg.....	55, 56
Leather Care	22
Line, Pilot	85
Line, Pulling	85
Line, Winch Lines.....	85
Line Hose	98
Line Hose Bags	71
Line Hose Connectors.....	98
Line Hose Lubrication Tool.....	97
Lowell Ratchet Wrenches	34

P

Para-Pak.....	64
Patriot Rescue Trainer	103
Pay-Out Reels	87
Pilot Line	85
Pole Band	95
Pole Climbers.....	23,24
Pole Gaffs	29
Pole Straps	33
Pole Top Rescue Strap	104
Pulling Grips	86
Pulling Line.....	85
PVC Insulating Sheeting.....	96

R

Replacement Gaffs	29
Rescue Equipment.....	63, 64, 65
Rescue Randy	104
Rodeo Products	104
Roller Bags	69
Rope, Descent Device	60
Rope Snaphooks.....	60

S

Safety Booklets.....	106
Screwdrivers	36
Self Rescue Equipment.....	62-65
Shotgun Sticks	89
Skinning Knives.....	35
Slack Blocks	84
Sleeve Accessories.....	94
Sleeve Bags.....	70
Sleeves, Rubber Lineman	94
Slings.....	80-83
Splicers Bag	73
Staple Sticks.....	36
Strap Hoist.....	86
Suspension Trauma	62

T

Tape Slings	22
The Finger.....	97
Tool Apron.....	76
Tool Bags	68, 73, 74
Tool Boards.....	75, 76
Tool Snaps	22
Tool Tray.....	76
Traveling Grounds.....	99
Tree Climbers.....	25
Tree Gaffs.....	29
Tree Saddles	13, 14
Truck Ground	95

U

URD Disconnect Tool.....	88
--------------------------	----

W

Winch Line.....	85
Winch Line Maintenance	85
Wire Basket	87
WPFRD	30
Wrenches.....	34



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

2.....	29	24RBR SERIES	70	76PAT.....	30
2SC	29	24SL SERIES	69	76PAT-OR	30
3.....	28	24SLGP SERIES.....	69	76PAT-ORC.....	30
4G	28	25A SERIES.....	17	76PAT-RT-100	103
4HP	21	25AF	9	76PAT-T.....	30
4HPX	21	25AFM2	9	78 SERIES.....	33
4STR	21	25AM2 SERIES.....	17	80.....	16
4T.....	28	25BS	18	80HDS.....	16
5.....	29	25KLBS	18	80X	16
8D	34	25PLS	18	81.....	16
10HBT	41, 49	25PS	18	81-1	16
10S SERIES	68, 72	25R	18	83H2D	16
11BPD SERIES	68	26DRM.....	18	85N SERIES	28
11DC SERIES.....	69	26G	18	86N SERIES	28
12S SERIES.....	69	26L.....	18	87N SERIES	28
14.....	29	27.....	29	88.....	12
14 GLOVE SERIES.....	92	31 Series.....	22	884D	11
14ATS.....	28	32 Series.....	22	88BMX4D	11
14ATSB	28	32AR	22	88BMX4DCC.....	11
14P	29	33.....	22	88BMX4DMP.....	11
14T.....	29	33L.....	22	88FFX4D	8, 9
14TS	28	35GP	84	88GX4DCC.....	10
14TSB	28	35H	84	88GX4DMP	10
15.....	36	41NW-2HL.....	33	88MX4DCC.....	10
15FG	36	42NW-2HL.....	33	88MX4DMP	10
16- GLOVE SERIES	91	43NW-2HL.....	33	88UX4DCC.....	10
16ATS.....	28	44NW-2HL.....	33	88UX4DMP	10
16TS	28	47N-15.....	33	88X	12
18 GLOVE SERIES.....	91	47N-18.....	33	88X4D	11
18 SERIES BUCKETS	72	51N-2HL.....	33		
23 SERIES BUCKETS	72	52N-2HL.....	33		
24 SERIES	69	53N-2HL.....	33		
24HSC SERIES	71	54N-2HL.....	33		
24RBC SERIES	70	57 SERIES.....	104		



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

89N Series	28	111JBS	89	555 SERIES	98
100TDE	34	111JBSX	89	556 GLOVES	102
101TDE	34	111JLMS	89	560 SERIES	98
103TDE	34	111JLMSX	89	567 SERIES	89
105 PADS	26	111LWH	21	580M	93
110Y GLOVE SERIES	91	111LWHX	21	581K	93
1100Y GLOVE SERIES	91	111SK	21	600-12	36
111BWH	21	111SKX	21	600-4	36
111BWHX	21	111YS	89	600-6	36
111FLDSX	20	111YSX	89	600-8	36
111FLEX	20	112CIL	89	602A	91
111FLSX	20	112CILX	89	602AT	91
111FLSXE	20	112HLS	22, 89	602-7DD	36
111HE	19	112HLSX	22, 89	625	90
111HEX	19	120 GLOVE SERIES	102	628	90
111HLDS	19	130D PADS	27	630	90
111HLDS-S	20	140D PADS	27	639BBS	14
111HLDSE	19	140Y GLOVE SERIES	92	639BBL	14
111HLDSX	20	145 PADS	26	640BBS	15
111HLDSXE	20	148 GLOVE SERIES	102	640BBL	15
111HLDSX-S	20	150 GLOVE SERIES	102	632RR	104
111HLE	19	150-12	34	650MB	104
111HLEX	19	150V PADS	27	650RDB	104
111HLS	19	160N	12	656CM	12
111HLS-S	20	210 SERIES	71	656PX	12
111HLSX	19	212 SERIES	71	662	42
111HLSX-S	20	216	98	662AB	45
111HS	19	270B	72	662AC	45
111HSX	19	300A	86	662ACS	50
		300DA	86	662AD	45
		336A SERIES	99	662GA	45
		420G	35	662GD	45
		430G	35	662RA	45
		550 SERIES	98	662RD	45



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

662VA.....	46	724.....	76	960 SERIES.....	81
662VD.....	46	726.....	74	960Y.....	81
683GA.....	44	727L.....	76	962 SERIES.....	81
683GD.....	44	731CS.....	77	962NWTs.....	80
683XA.....	44	744.....	77	962Y-CL.....	83
683XAP.....	49	745.....	77	965 SERIES.....	81
683XB.....	44	750DE SERIES.....	85	965Y-CL.....	83
683XBP.....	49	750MP SERIES.....	85	999 GLOVE SERIES.....	93
683XC.....	44	770R.....	81	1050 GLOVE SERIES.....	93
686XC6.....	64	770RDE.....	81	1057 GLOVE SERIES.....	93
683XC6EQT.....	50	770W.....	81	1200 GLOVE SERIES.....	93
683XCP.....	49	804.....	22	1511N.....	12
683XD.....	44	806 SERIES.....	22	1515PX4D.....	10
683XDP.....	49	809.....	22	1515PX4DCC.....	10
683XDT.....	50	815.....	102	1550-4.....	35
696NW.....	63	884D.....	11	1590C SERIES.....	99
700BK.....	76	900 SERIES.....	87	1671-10.....	86
700FP.....	63	900-6.....	36	1672-10.....	86
700FWI.....	63	901LF.....	87	1685-20.....	86
700TF.....	97	901TI.....	87	1685-31.....	86
703.....	59	902 SERIES.....	86	1686-10.....	86
703R.....	59	903LT.....	85	1686-20.....	86
703R-2D.....	59	910 GLOVE SERIES.....	92	1901 SERIES.....	89
706.....	73	930.....	87	1967B.....	72, 88
706-20.....	74	930T.....	95	2002NWB SERIES.....	51
706S.....	73	930TG.....	95	2004NWB SERIES.....	51
708 SERIES.....	75, 76	930UT.....	87	2005NWB SERIES.....	51
712 SERIES.....	75	940 SERIES.....	84	2011 SERIES.....	80
717.....	73	945 SERIES.....	84	2011P SERIES.....	59
719.....	95	950 SERIES.....	80		
719-CAUTION.....	95	951 SERIES.....	80		
721AM.....	74	952 SERIES.....	80		
722AM.....	74	953 SERIES.....	80		
723AM.....	74	956 GLOVE SERIES.....	102		



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

2011P1 SERIES.....	59	4002NW SERIES.....	57	BE4 SERIES.....	104
2012 SERIES.....	80	4004NW SERIES.....	57	BED662VDEF.....	50
2012P SERIES.....	59	4005NW SERIES.....	57	BEDQ683XD1.....	50
2027 SERIES.....	55	4016 SERIES.....	32	BHP.....	29
2028 SERIES.....	55	4017NW SERIES.....	57	BN9327.....	54
2028NWB SERIES.....	55	4018 SERIES.....	31	BSH20.....	77
2302 SERIES.....	53	4019 SERIES.....	31	BSH50.....	77
2305 SERIES.....	53	4950-58Y.....	81	BSK SERIES.....	35
2306 SERIES.....	53	4951-58Y.....	81	BSS2000.....	36
2315 SERIES.....	53	5395A.....	60	BSS2001.....	36
2317 SERIES.....	53	8690CK.....	88	BW SERIES.....	34
2327 SERIES.....	56	8690FH.....	88	D2000-9NE.....	35
2328 SERIES.....	56	44005.....	35	D2000-9NETH.....	35
2464.....	98	B1972F.....	29	D213-9NE.....	35
2466.....	98	B1972G.....	29	D507 SERIES.....	34
2802 SERIES.....	52	B6232.....	36	DEQ662HA.....	47
2804 SERIES.....	52	B662AA.....	45	DEQ683XA.....	47
2805 SERIES.....	52	B662AD.....	45	DEQ683XD1.....	47
2815 SERIES.....	52	B683XA.....	44	DL11DC-R SERIES.....	69
2817 SERIES.....	52	B683XD.....	44	DL11DC-RB SERIES.....	69
2827 SERIES.....	56	B809.....	36	DSD30.....	60
2828 SERIES.....	56	B832.....	36	EL23BFM.....	105
3004.....	60	BC136 SERIES.....	71	EL27B.....	105
3006.....	60	BC18F.....	88	EL29B.....	105
3006K.....	60	BC24F.....	88	FE683EZTWR.....	49
3007A.....	60	BD12 SERIES.....	24	FE700BMSRSC.....	65
3008A.....	60	BD12C SERIES.....	24	FE700SRKSC.....	65
3146.....	34	BD12L SERIES.....	24	HV SERIES.....	89
3550.....	84	BD14B SERIES.....	23	LB SERIES.....	96
		BD14BT SERIES.....	25	LBCP160.....	97
		BD16B SERIES.....	23	LBS SERIES.....	96
		BD16BC SERIES.....	23	LBSV SERIES.....	96
		BD16BCT SERIES.....	25	LMG SERIES.....	85
		BD16BT SERIES.....	25	M94.....	105



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

ME3 SERIES	105
ME91R	105
PA2000	86
PVC SERIES	96
Q662ZA	49
Q664T	48
Q83H2D.....	16
Q88BMX4D.....	11
Q88BMX4DCC	11
Q88BMX4DP	11
Q88GX4DCC	10
Q88GX4DMP	10
REST	62
RESTEP	62
REST-SR.....	62
RJL1967RCP	88
RR165	104
SF4	94
SH1	94
SH200	89
SH216	89
SH230	89
SL6650A	60
SLL SERIES	94
SLR SERIES	94
SLXL SERIES	94
SR2804 SERIES.....	64
SR700XPL	64
SRPACK-100AL	64
SS2	94





BASHLIN INDUSTRIES INC.

119 W. PINE STREET GROVE CITY, PA 16127

724.458.8340 WWW.BASHLIN.COM